

# EXTRA NARROW RGB DURASTRIP

## LED

LED 3535 RGB  
120 LED/m  
14,4W/m  
24VDC  
Lifetime: >50,000 h  
Warranty: 5 years

## COLOURS OF LIGHT

RGB

## DIMMABILITY

Dimmable 0-100%  
DALI - DMX  
Analogue and digital domotic control systems  
Push Dali with ZKODA controllers  
CASAMBI compatible

## CONNECTIONS

IP20: terminals with free wires  
Maximum connection length 5 m. Max 4A.  
For longer connections, connect in series or parallel, diagram on page 160.  
Strips can be cut to size by following the cutting indications printed on the strips.

## ASSEMBLY

Complete with 3M double-sided tape to attach to the surface.  
When using double-sided tape decrease the application surface adequately


## PACKAGE

Packaged in 3 m reels.  
Or custom products cut to specific lengths see page 11, 318.

The EXTRA NARROW series is a concentrate of quality materials that they share with other DURASTRIP: high quality choices to ensure a professional level performance, excellent heat dissipation and long duration, Ra >90. EXTRA NARROW is the range with the smallest substrate in the entire collection. Just 5 mm wide - 6 mm for the RGB version- it solves all needs not only connected to confined spaces but above all for particularly light and characteristic 'light designs', even when using the infinite range of RGB colours.

To be used with thin section profiles in the range. The type of LED source used and the short distance between the sources eliminate the speckled effect even in profiles with lenses that are very close together.

LED SPACING AND PITCH CUT

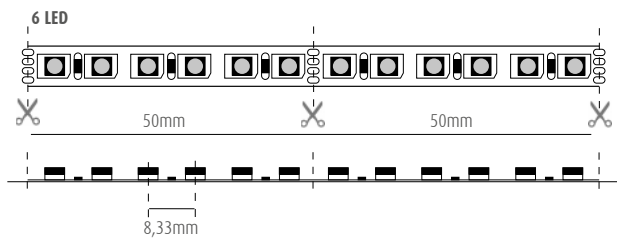

618-  
628nm



520-  
528nm



464-  
474nm

Cutting DURASTRIP to size\*:

fixed cost of piece work

VA01

\* Please consider pitch cut. Includes a 20 cm cable.



# EXTRA NARROW RGB DURASTRIP


<b>PRO</b>	24V DC	Ra>90	50000h L70	IP20	-25° +35°C	III	UL E471161	G5/h24	Risk Group 0
------------	--------	-------	------------	------	---------------	-----	---------------	--------	--------------

MIN 3,5mm		NO DOT
--------------	--	-----------

art.	W/m	lm/m	K	N° LED/m		L	L1	L2		
<b>07URGB2412INEN</b>	14,4	--		120	120°	6	3,5	3000°	8011905	1

\*Warning: this strip is 3 metres long.

- Limited availability - reorderable only with MOQ



For further details on other connection configurations see the connection diagrams on the following pages or at this link.



## DRIVER



75W IP20	XLG-100-24-A
75W IP68	XLG-100-24-A
47W IP68	XLG-100-24-A

DRIVER: complete info on page 161

## CONTROLLER



<b>DALI-ZKTPC</b> (DALI)
<b>ZKCDAFF</b> (DALI)
<b>ZKCDMXWFF</b> (DMX)
<b>ZKC1-10FF</b> (1-10)
<b>FF = FLICKER FREE</b>

## PROFILES



P02A-S-PF-200	P04G-S-PF-300
P03A-S-PF-200	P06B-S-PF-300
P01C-S-PF-300	P01I-S-PF-300
P01G-S-PF-200	P01D-S-PF-200
P01F-S-PF-200	