

PLASTER-IN PROFILES: P02F

CHARACTERISTICS

Profile for recessed 'internal' corner installation equipped with protection flaps for a perfect finish. Recessed support along the profile for perfect stability.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

10 mm.

MAXIMUM POWER

15W/m

MATERIALS

6063 aluminium profile with white polycarbonate screen.

ACCESSORIES INCLUDED



Every 3 metre bar is complete with 3 end caps (with and without hole).

INSTALLATION

For recessed installation in plasterboard or ceilings with tiles. Cabling can be in line with the profile or exit the bottom of the profile.

PACKAGE

Supplied in packages of 5 bars, each one measuring 3 meters complete with screen and accessories. Spare accessories available with separate code.




Cutting Project profiles to size*:

fixed cost of piece work

VA04

* Includes mounting accessories.

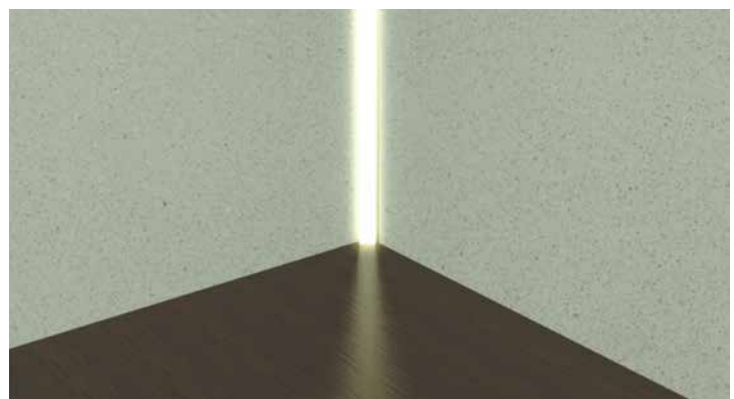

IP20

IK10

art	Description	L1	H	L	8011905	
P02F-S-PF-300 ◆	internal corner profile complete with screen and accessories	41,7	41,7	3000	913106	1 / 5
MAX 10mm	◆ To be discontinued					



art	Description	8011905	
P02F-A-EC ◆	3+3 PC silver colour end caps	913113	1

◆ To be discontinued