

RECESSED PROFILES: P08D

CHARACTERISTICS

Recessed profile with edge protection finishing flaps. Equipped with a guide to fix the LED strips to.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

34 mm.

MAXIMUM POWER:

40W/m

MATERIALS

6063 aluminium profile with white PMMA screen.

ACCESSORIES INCLUDED


Every 3 metre bar is complete with 3 sets of end caps (with and without hole) and 3 sets of springs for the ceiling.

INSTALLATION

Recessed. Cabling can be in line with the profile or exit the bottom of the profile.

PACKAGE

Supplied as a single 3 metre bars complete with screen and accessories. Spare accessories available with separate code.




Different levels if guide insertion with strips


17 mm

30 mm

40 mm

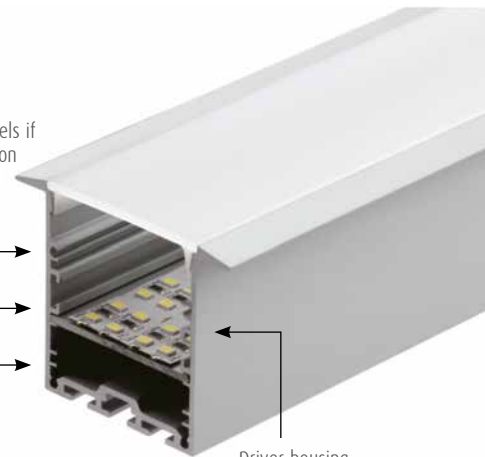

Driver housing code
ZK73100-SL

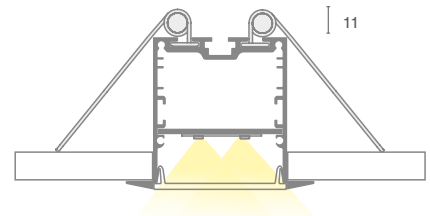

Cutting Project profiles to size*:

fixed cost of piece work

VA04

* Includes mounting accessories.

IP20

art	Description	L1	H	L	8011905	1
P08D-S-PF-300	profile complete with PMMA screen + guide and accessories	62,5	50,5	3000	913274	1


MAX
34mm



▪ Limited availability - reorderable only with MOQ



art	Description	8011905	1
P08D-A-EC	3+3 metal end caps	913281	1



art	Description	8011905	1
P08D-A-SP	3 sets of metal springs to attach to the ceiling	913298	1

▪ Limited availability - reorderable only with MOQ