

SURFACE PROFILES: PRAP

CHARACTERISTICS

Aluminium profile for surface mounting installations. Aluminium profiles allow for a more stable installation, in case of linear installations.

Recommended for indoor and outdoor (protected) applications and for high power strips in order to better heat dissipation.

CAN BE USED WITH LED STRIPS WITH A MAXIMUM WIDTH:

12 mm (PRAP20) and 15 mm (PRAP68).

MAXIMUM POWER

20W/m 20 Series

25W/m 68 Series

MATERIALS

6063 Aluminium profile with a white PC screen.

ACCESSORIES


Every 2 metre bar is complete with 2 sets of end caps (with or without holes) and 2 sets of mounting clips.

MOUNTING

Recessed.

PACKAGE

Supplied in packages of 5 bars of 2 meters complete with screen and accessories.

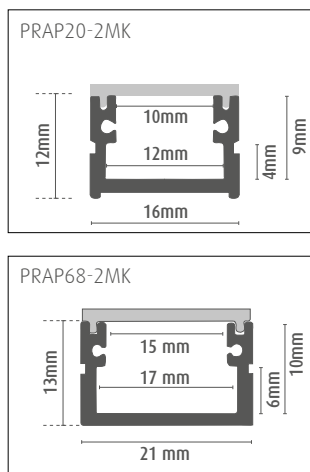

IP68/IP65



IP65 or IP68 strips the connectors rest outside the profile.

Cutting Universal and Essential profiles to size*:

fixed cost of piece work

VA03

* Includes mounting accessories.

art	Description	L1	H	L	8011905	
PRAP20-2MK	profile complete with PC screen + accessories	16	12	2000	951405	1/5
PRAP68-2MK	profile complete with PC screen + accessories	21	13	2000	951412	1/5



Kit caps and clips for surface mounting

art	Description	8011905	
KTPRAP20	10 clips, 5 end caps without hole + 5 end caps with hole for the cable.	834821	1
KTPRAP68	10 clips, 5 end caps without hole + 5 end caps with hole for the cable.	834791	1

ADJUSTABLE SUPPORTS FOR PRAP68-2MK PROFILE



art		8011905	
OR-DEV	SET OF TWO STEEL ADJUSTABLE SUPPORTS	844004	1



art		8011905	
OR-DEVKT68	SET OF TWO ALUMINIUM BRACKETS FOR PRAP68-2M PROFILES.	844028	1