

SURFACE PROFILES FLESSIBILI: PRAPFLEXVERT

CHARACTERISTICS

Flexible extruded PMMA highly resistant profile with a white diffusing cover. PRAPFLEXVERT places the strip in a vertical position to the base for 'wall washer' lighting. Can be used to follow curved lines; minimum curve diameter 43 cm.

CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

12 mm.

MAXIMUM POWER:

10W/m

INSTALLATION



Surface installation. Attach using the clips provided.

ACCESSORIES INCLUDED

Installation kit included 20 mt.: 40 steel clips, 20 side caps without hole and 20 side caps with holes for cabling.

PACKAGE

Available in lengths of 20 m. Spare accessories available with separate code.

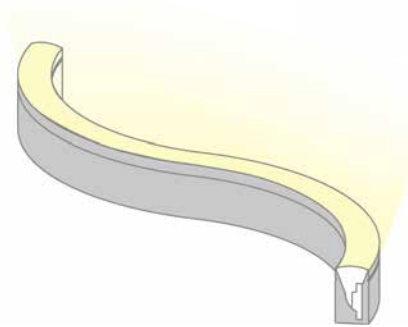

VERTICAL EMISSION
TO THE PLANE

Cutting Project profiles to size*:

fixed cost of piece work

VA04

* Includes mounting accessories.



art.	Description	L1	H	L	8011905	
PRAPFLEX20-VERT ♦	flexible PMMA profile and accessories	10	18,50	20000	852474	1

MAX 11mm ♦ To be discontinued



art	Description	8011905	
PRAPFLEXVERT-EC ♦	5+5 PC end caps	933470	1



art	Description	8011905	
PRAPFLEXVERT-CL ♦	5 sets of metal clips (1 set for every 5 meters is recommended)	933487	1

♦ To be discontinued