

CHARACTERISTICS

LED
5W - 24V
Ra >90
Duration: >50,000 h
Warranty: 5 years

COLOUR OF LIGHT

Choice of white colour temperature.

BINNING

ANSI/SDCM: 2 step.
2700K - 3000K - 3500K

DIMMABILITY

Dimmable 0-100%
DMX
DALI - 1-10

CONNECTIONS

Maximum connection length: 5 m.

ASSEMBLY




Choice of surface mounting brackets with different angles:
15°, 30°, 45°.

Modular system composed of elements connected by a flexible cable. The advantage of Microlini is the possibility to arrange the modules in a nonlinear way and to bring light to irregular surfaces, particularly complex cove lighting or to signage. The different spring clips provide the possibility to direct the light with angles that can be different even for every single element.

Composed of a 6.35 cm (2.25") extruded aluminium body complete with a 0.5 W LED strip, a polycarbonate screen and aluminium end caps. They are ready to use and allow for quick and durable installation. The connection cable is 5 cm long and makes it possible to position the elements at angles very close together.




CODE COMPOSITION

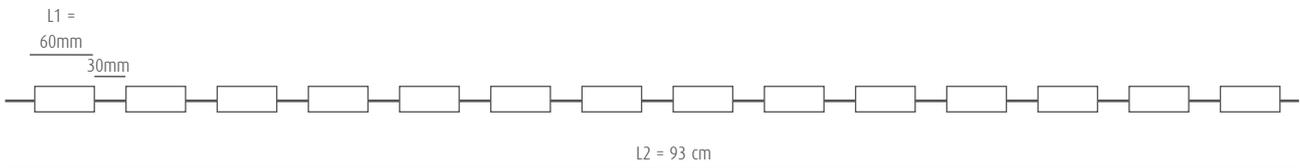


art.	W/M	K	N° of modules	Ø	L1	L2	
MCL127 ▶	5	2700	10	15,8	60	930	1
MCL130 ▶	5	3000	10	15,8	60	930	1
MCL135 ▶	5	3500	10	15,8	60	930	1


▶ Orderable only with MOQ




art	Description	
MCL-A-CL ▶	Steel surface mounting bracket with retractable screws (screws not included). Package of 10 pieces: We recommend using 1 bracket for every module.	1



art	Description	
MCL-A-CL15 ▶	Steel mounting bracket for positioning at an angle of 15° to the surface; for retractable screws (screws not included). Package of 10 pieces: We recommend using 1 bracket for every module.	1



art	Description	
MCL-A-CL30 ▶	Steel mounting bracket for positioning at an angle of 30° to the surface; for retractable screws (screws not included). Package of 10 pieces: We recommend using 1 bracket for every module.	1



art	Description	
MCL-A-CL45 ▶	Steel mounting bracket for positioning at an angle of 45° to the surface; for retractable screws (screws not included). Package of 10 pieces: We recommend using 1 bracket for every module.	1

▶ Orderable only with MOQ