

## SURFACE PROFILES FLESSIBILI: PRAPFLEXVERT

### CHARACTERISTICS

Flexible extruded PMMA highly resistant profile with a white diffusing cover. PRAPFLEXVERT places the strip in a vertical position to the base for 'wall washer' lighting. Can be used to follow curved lines; minimum curve diameter 43 cm.

### CAN BE USED WITH LED STRIPS WITH MAXIMUM WIDTH:

12 mm.

### MAXIMUM POWER:

10W/m

### INSTALLATION



Surface installation. Attach using the clips provided.

### ACCESSORIES INCLUDED

Installation kit included 20 mt.: 40 steel clips, 20 side caps without hole and 20 side caps with holes for cabling.

### PACKAGE

Available in lengths of 20 m. Spare accessories available with separate code.

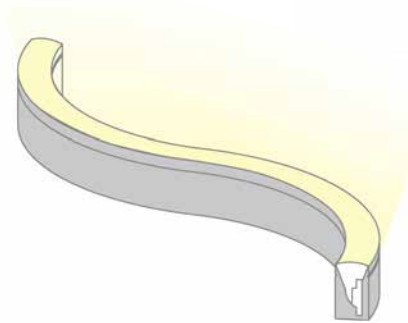

VERTICAL EMISSION  
TO THE PLANE

Cutting Project profiles to size\*:

fixed cost of piece work

VA04

\* Includes mounting accessories.



art.	Description	L1	H	L	8011905	
<b>PRAPFLEX20-VERT</b>	flexible PMMA profile and accessories	10	18,50	20000	852474	1



art	Description	8011905	
<b>PRAPFLEXVERT-EC</b>	5+5 PC end caps	933470	1



art	Description	8011905	
<b>PRAPFLEXVERT-CL</b>	5 sets of metal clips (1 set for every 5 meters is recommended)	933487	1