

TONDO LUMINOUS PROFILE

TYPE

Extruded aluminum profile complete with screen and high efficiency LED strip: optimal replacement of T5 tubes.

CHARACTERISTICS

Supplied on a customized project base, complete with input and output M / F wiring. The profile is produced with included 12V or 24V strip; light colour selectable among those of the DURASTRIP PRO. Performance: 16W / m; 1440lm / m.

MATERIAL


Extruded aluminum finned body for optimal heat dissipation; polycarbonate cover.

INSTALLATIONS

Specially structured for the typical retail shelves.

NB

Contact the sales force for MOQ and light colour customizations.

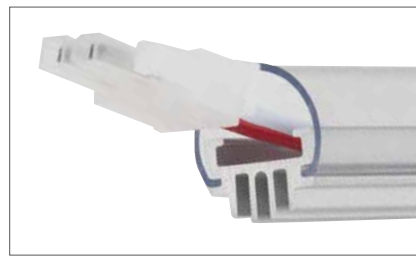

PRO	Ra>90		50000h L70	IP20	-25° +35°C		G5/h24	
------------	-------	--	---------------	------	---------------	--	--------	--

CODES' STRUCTURE

art.	Profile length in cm
04U2414300100 ▶	= (1 meter)
04U2414400060 ▶	= (60 cm)

▶ Orderable only with MOQ

Those in the table are examples of how to compose the code.
Code 04U= Tondo profile; 24= Volt; 14=watt; 30=colour of the light;
the last 4 digit specify the desired length in centimeters (0100=1 meter);
max length 2,4 mt. Cutting distance: every 10cm.

