


CCT EVOLUTION



TARGETTI

TARGETTI

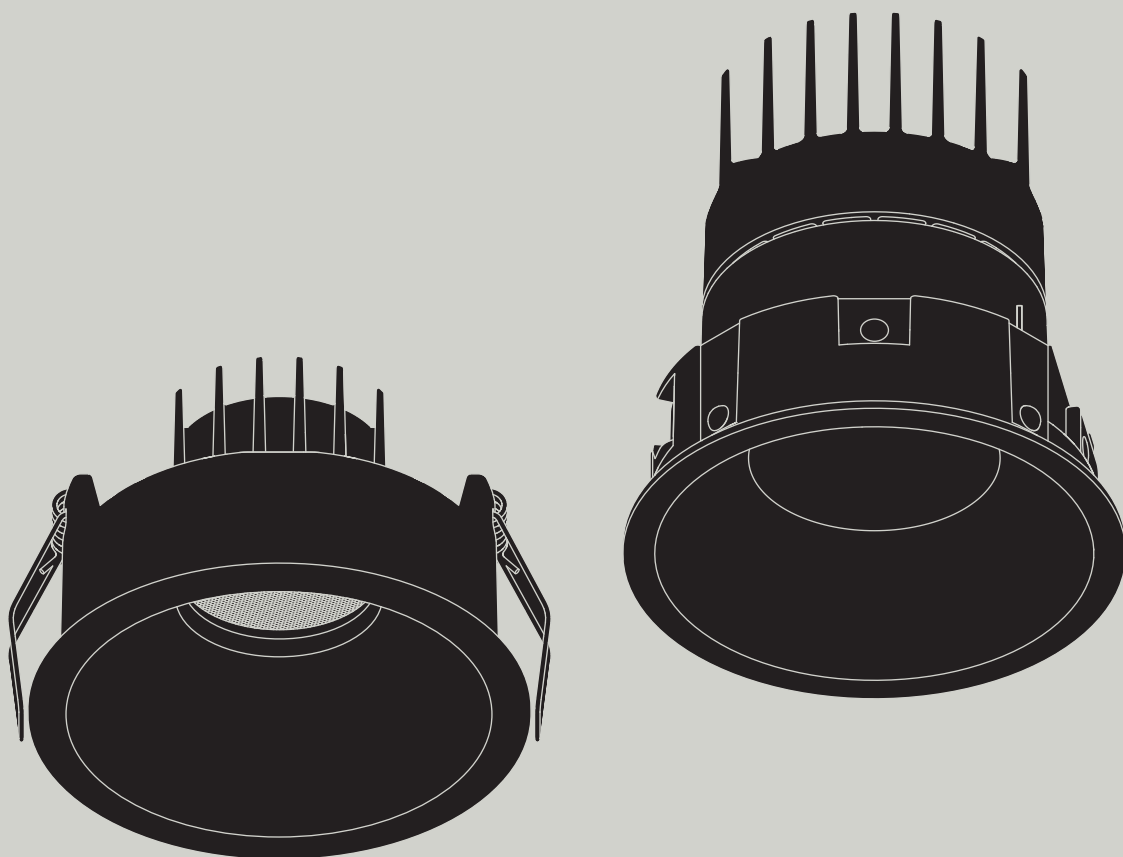



CCT Evolution



FAMILY








Light has a thousand nuances,
infinite tones and extraordinary expressive
power but this intangible entity needs
to be controlled by tools that are able to
adjust it, shape it and direct it.

This is the reason behind CCTEvolution,
the new generation recessed LED fixtures
for professional architectural lighting.
Two different product ranges,
different by function.

A broad and extensive programme with different sizes and lumen packages for each range in order to meet different performance needs even within the same project.

















**CCT Evolution
Downlight**


		Ø100mm	Ø85mm	Ø75mm	Ø70mm	Ø50mm	
	Versions	Trim					
	Beam angle	SP			•	•	
		FL	•	•	•	•	
		MWFL	•			•	
		WFL	•				
	Source Flux	up to 1000lm			•	•	•
		from 1000lm to 1500lm	•		•	•	
		from 1500lm to 2000lm	•		•		
		from 2000lm to 2500lm		•			
		from 2500lm to 3000lm	•				
		from 3000lm to 3500lm					
		from 4000lm to 4500lm					
	Colour temperature	3000	•	•	•	•	•
		3500	•	•	•	•	•
		4000	•	•	•	•	•
	Colour rendering	CRI90					
	Max installation depth	70mm			•	•	
		90mm	•				
		100mm				•	
		130mm					
		140mm		•			
		160mm					
	IP protection rating	IP20					



CCTEvolution Adjustable

		Ø150mm	Ø125mm	Ø100mm	Ø85mm	Ø75mm	Ø70mm	Ø50mm	
	Versions								
	Beam angle	SP							
		FL							
		MWFL							
		WFL							
	Source Flux	up to 1000lm							
		from 1000lm to 1500lm							
		from 1500lm to 2000lm							
		from 2000lm to 2500lm							
		from 2500lm to 3000lm							
		from 3000lm to 3500lm							
		from 4000lm to 4500lm							
	Colour temperature	3000							
		3500							
		4000							
	Colour rendering	CRI90							
	Max installation depth	70mm							
		90mm							
		100mm							
		130mm							
		140mm							
		160mm							
	IP protection rating	IP20							

CCTEvolution Downlight

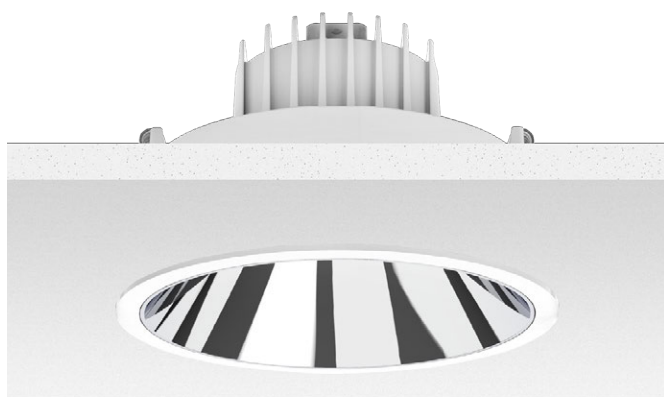

The best tool for high quality general lighting, ideal for offices and communal areas.

Designing general lighting for a space focuses mainly on horizontal planes, favouring performance, uniformity and complete compliance with reference standards especially when dealing with the workplace. To satisfy this need the CCTEvolution Downlight was created.







Available optics



SP



FL



MWFL



WFL



Source Flux

From 575lm
to 2657lm




LED source

White Led CRI90



Colour temperature



3000 K



4000 K

3500 K



2

Finishes



5

Diameters



Trim


→ Led CRI90 efficiency up to 83lm/W



IP20

CCTEvolution Downlight

The wide range of diameters, lumen packages and colour temperatures allow for total design freedom to provide the right solution to meet every need.

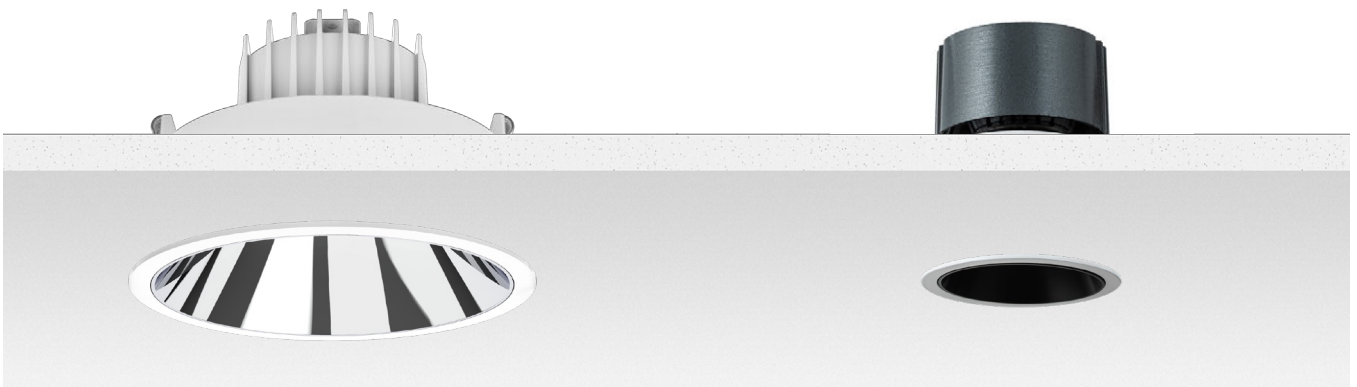



Ø100mm
Max 25W - 1993lm



Ø85mm
Max 20W - 2300lm



Ø75mm
Max 15W - 1226lm



Ø70mm
Max 12W - 1380lm



Ø50mm
Max 5W - 575lm

Tones

All versions are equipped with high quality LED sources, all CRI90 with colour temperatures of 3000K – 3500K – 4000K.

This makes it possible to have multiple design solutions for those environments where warmer or more neutral tones are required.



Power supply

The different types of power supply make the CCTEvolution Downlight suitable for different application solutions, from small spaces to large projects.

- **Electronic**
- **DALI**



CCTEvolution Adjustable



Accent light is capable of creating and transforming the atmosphere of a space.

The incredible charm of this type of lighting is produced by the contrast between areas of light and shadow and from the transition between the two light conditions. This type of lighting cannot disregard the use of professional fixtures since light contributes significantly to creating the style of a space.







Available optics



SP



FL



MWFL



WFL



Source Flux

From 575lm
to 4123lm



LED source

White Led CRI90



Colour temperature



3000 K



4000 K

3500 K



2

Finishes



7

Diameters



Trim

→ Led CRI90 efficiency up to 83lm/W




IP20

CCTEvolution Adjustable

CCTEvolution Adjustable is the most technical and sophisticated version of the CCTEvolution range. It is the most suitable solution for highly specialised professional accent lighting.

A range of adjustable recessed projectors with focused light available in 7 different diameters with different lumen packages and four different beam openings.

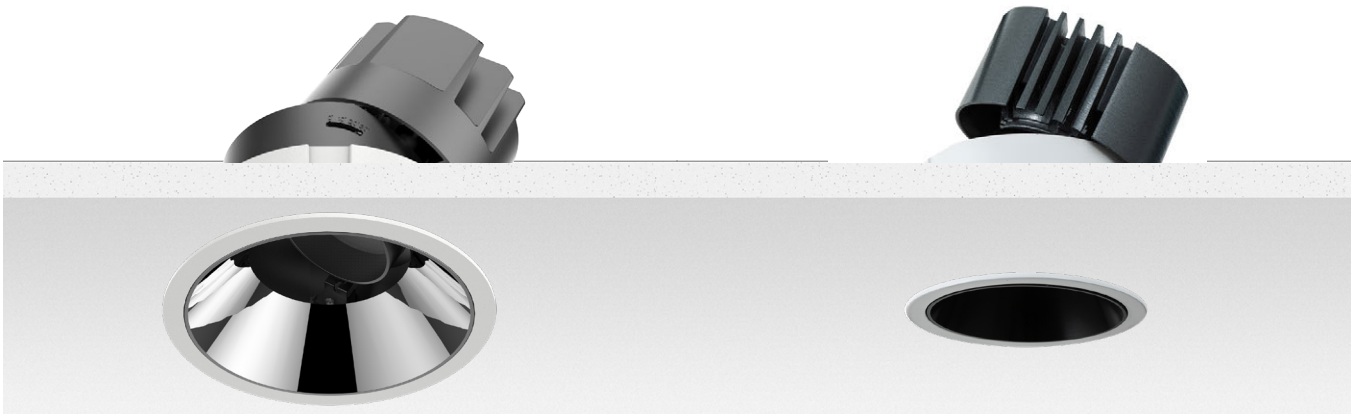



Ø150mm
Max 40W - 3092lm

Attention to detail
CCTEvo Adjustable is designed to light spaces where attention to aesthetic detail is important.



Ø125mm
Max 32W - 2615lm



Ø75mm
Max 15W - 1226lm



Ø100mm
Max 25W - 1993lm



Ø70mm
Max 12W - 1380lm



Ø85mm
Max 20W - 2300lm



Ø50mm
Max 5W - 575lm

Power supply

The different types of power supply make the CCTEvolution Architectural suitable for different application solutions, from small space to large projects.

- Electronic
- DALI









CCTEvolution

**Targetti Lighting
(Beijing) Co., Ltd**

Room 921, Unit 3,
Guanghualu Soho I,
No. 22 Guanghua Road,
Chaoyang District Beijing
Cina 100020

Phone +86 10 65388956
targetti@targetti.com
www.targetti.com

Graphic design lcd.it

Credits

