


## 1E3362EL | JEDI COMPACT Outdoor Projector

### Adjustable linear LED projector



	4000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)		
	Ra80	80°	13°				
Fixture Power	28W	1	1.68	0.23	3982		
Source Flux	3600lm	2	3.36	0.46	996		
Fixture Flux	1908lm	3	5.04	0.68	442		
Efficacy	68lm/W	4	6.72	0.91	249		
TS1090	I <sub>max</sub> =1106cd/klm	I <sub>max</sub>	3982cd	5	8.40	1.14	159

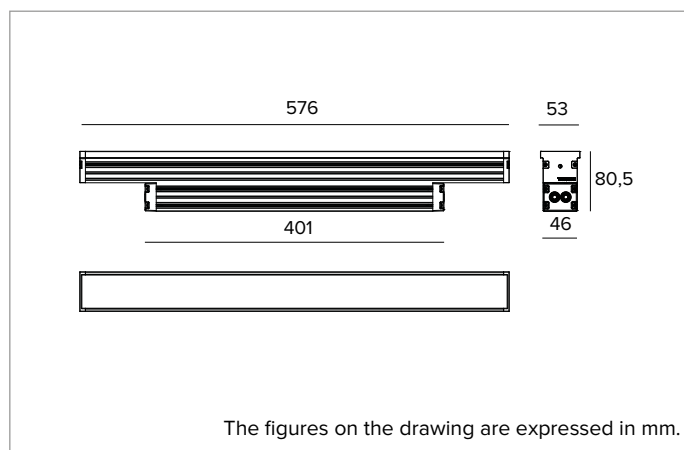

#### SOURCE

High Power High Efficiency Ra80 linear LED board. Ra90 on request.

**Energy efficiency class:** D

**Nominal power:** 24W

**Nominal flux:** 3600lm

**Colour rendering index:** 80

**Rf:** 82.6

**Rg:** 95.7

**CCT nominal:** 4000K

**SDCM:** 3

**Lifetime (L80/B10):** >50000h tq +25°C

#### ILLUMINOTECHNICAL CHARACTERISTICS

Internal optical system composed of a primary cylindrical glass lens, a high reflectance anodised aluminium reflector and an integrated holographic filter. Grazing light version. Version with an integrated Louver effect grid.

**Optic:** HYBRID

**Beam angles:** GRZ

**Optical efficiency:** 53%

**Fixture flux:** 1908lm

**Luminous efficacy:** 68lm/W

**Photobiological safety:** Compliant with RG1 low risk group

#### MECHANICAL CHARACTERISTICS

Extruded anodised aluminium 15μ body. Extra clear 5mm thick glass flat screen. The body of the fixture is adjustable and can be installed away from the mounting surface using accessory snap brackets.

**Colour and finish:** Aluminium

**Dimensions:** L=576mm

**Weight:** 2.2Kg

**Version:** LOUVRE - INTEGRATED DRIVER

**Degree of protection:** IP66,IP67

**Mechanical Resistance:** IK08

#### ELECTRICAL CHARACTERISTICS

Integrated driver version. Complete with electronic ON-OFF power supply. Pre-cabled with a 1 metre 3x1mm<sup>2</sup> H07RN-F cable. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

**Fixture Power:** 28W

**Power supply:** 220-240Vac 50/60Hz

**Insulation Class:** CLASS 1

**Type of driver / Control:** ON-OFF

**Driver included:** YES

**Class F:** YES

**SAFE FLICKER:** PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

**Ambient temperature:** -25°C / +35°C

#### INSTALLATION

To be completed with stainless steel adjustable brackets.

#### NOTES

Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. 110-277Vac version available on request.

#### WARRANTY

5 years.

#### WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**

## 1E3362EL | JEDI COMPACT Outdoor Projector

### Adjustable linear LED projector

#### Related codes

##### Bracket

Code	Code
<b>1E3304</b>	<b>1E3306</b>
Stainless steel short bracket kit for surface installation (2 pieces). Rotation +/-90°.	Stainless steel long bracket kit for surface installation (2 pieces). Rotation +/-90°.

#### Accessories

##### Tool



Code
<b>1E3305</b>
Tightening wrench for the connector kit.

##### Connector




Code
<b>1E2769</b>
Linear connection box IP66/IP68. 5 poles max. wire section 1.5mm <sup>2</sup> . Cable diameter range from 7 to 12mm.



Code
<b>1E2494</b>
Multiple connection box IP68. 1 IN - 3 OUT 4 poles max. wire section 2.5mm <sup>2</sup> . Cable diameter range from 6 to 12mm.

##### Surge protector



Code
<b>A013A</b>
Surge protector compatible with CLASS I lighting fixtures. Operating voltage 230-277Vac. SPD type 2+3. Max surge protection 10kV. CLASS I IP67

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**