



1E4038 | DART Round Small TW

Professional adjustable LED projector



The fixture's photometric values can be found on the following pages

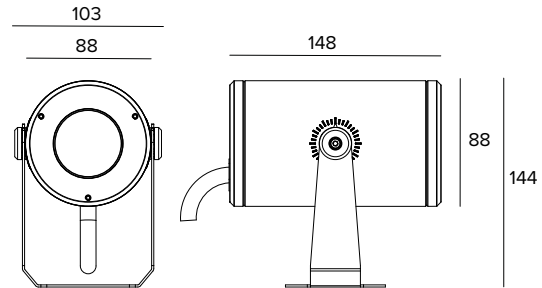

The figures on the drawing are expressed in mm.

SOURCE

Tunable White board made of high efficiency Ra80 LED Emitters that allow to reach and choose a color temperature between 2700K and 5000K.

Energy efficiency class: F

Nominal power: 4,2W

Nominal flux: See photometries

Colour rendering index: 80

Rf: 83

Rg: 97

CCT nominal: See photometries

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Equipped with precision methacrylate lens and spreader filter.

Optic: LENS

Beam angles: FL

Optical efficiency: 70%

Fixture flux: See photometries

Luminous efficacy: See photometries

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Painted die-cast anodised aluminium body and painted stainless steel mounting bracket. Tempered extra clear front glass.

Colour and finish: Ferrite

Weight: 1Kg

Degree of protection: IP66

Mechanical Resistance: IK10

ELECTRICAL CHARACTERISTICS

Remote electronic driver with DALI DT8 interface. The driver is housed inside an IP68 box and allows to control from 1 to 9 fixtures. All versions are pre-wired with a 1.5m long feeding cable H07RN-F (to be connected to the IP68 driver box).

Fixture Power: 4W

Power supply: 700mA

Insulation Class: CLASS 3

Driver included: NO

Ambient temperature: -25°C / +35°C

INSTALLATION

Mounting bracket with aiming adjustability. Adjustable up to $\pm 60^\circ$ on the horizontal pane and $+90^\circ/-45^\circ$ on the vertical plane.

NOTES

Casambi control system available using a dedicated accessory (only for DALI version products). Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. It is possible to subject the product to Cataphoresis treatment on request. 110-277Vac version available on request. Values related to the power consumption of the fixture do not take into account the consumption of the accessory driver, which depends on the choice of driver. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

1E4038 | DART Round Small TW
Professional adjustable LED projector



		5000K	H(m)	D(m)	Emax(lx)
		Ra80		32°	
Fixture Power	4W	1	0.57	984	
Source Flux	536lm	2	1.14	246	
Fixture Flux	374lm	3	1.72	109	
Efficacy	89lm/W	4	2.29	62	
TS1662	Imax=1836cd/klm	Imax	984cd	5	2.86




		3850K	H(m)	D(m)	Emax(lx)
		Ra80		32°	
Fixture Power	4W	1	0.57	1004	
Source Flux	547lm	2	1.14	251	
Fixture Flux	382lm	3	1.72	112	
Efficacy	91lm/W	4	2.29	63	
TS1662	Imax=1836cd/klm	Imax	1004cd	5	2.86

CW

CCT nominal	5000K
Nominal flux	536lm
Fixture flux	374lm
Luminous efficacy	89lm/W

NW

CCT nominal	3850K
Nominal flux	547lm
Fixture flux	382lm
Luminous efficacy	91lm/W

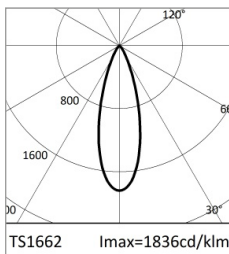

		2700K	H(m)	D(m)	Emax(lx)
		Ra80		32°	
Fixture Power	4W	1	0.57	846	
Source Flux	461lm	2	1.14	212	
Fixture Flux	322lm	3	1.72	94	
Efficacy	77lm/W	4	2.29	53	
TS1662	Imax=1836cd/klm	Imax	846cd	5	2.86

WW

CCT nominal	2700K
Nominal flux	461lm
Fixture flux	322lm
Luminous efficacy	77lm/W

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process. Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656



1E4038 | DART Round Small TW

Professional adjustable LED projector

Related codes

Power Supply

Code
1E4056

Tunable White DALI driver - 700mA.
50W, LxHxP=220x80x120mm, 110-277Vac.
IP68 gray powder coated aluminum box.

Accessories

Filter



Colour	Code
	1E4002

Blade of light filter.
PMMA holographic filter for a blade of light effect.
Completed with powder coated aluminum alloy holder ring.

Grid



Colour	Code
	1E4005

Anti-glare louver.
The central elements can be adjusted +/- 60° for a perfect glare control.
Powder coated stainless steel.

Screen



Colour	Code
	1E4003

Asymmetric screen.
Powder coated stainless steel.



Colour	Code
	1E4004

Cylindrical screen.
Powder coated stainless steel.
Short version.



Colour	Code
	1E4057

Cylindrical screen.
Powder coated stainless steel.
Long version.

Mounting System



Colour	Code
	1E3015

Plate for fixture rotation.
Powder coated stainless steel.



Dimensions ØxH mm	Colour	Code
70x182		1E3016

Earthspike.
Powder coated stainless steel.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656



1E4038 | DART Round Small TW

Professional adjustable LED projector

Control systems



Code

1E3048

IP67 wireless control unit with DALI interface.

It generates a local DALI2 bus, enabling a direct connection to a DALI interface LED driver.

The module can only be used in a closed system and cannot be connected to an existing DALI network.

The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology.

The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures.

The control unit is preset to the DALI 1CH profile, meaning the device can control a single DALI driver with broadcast commands.

In addition to the DALI broadcast, other operating modes are available, such as:

- Button (normally open)
- Control unit 0/1-10V
- Control unit DALI Tunable White DT8
- Presence sensor



Code

1E4369

IP67 Extender for wireless control of LED driver with dimming DALI interface based on Casambi technology.

It has a DALI2 output with the capacity to control up to 40 lighting fixtures.

With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.

IP67 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.

In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI