



1E4048 | DART Round Small RGBW

Professional adjustable LED projector



The fixture's photometric values can be found on the following pages

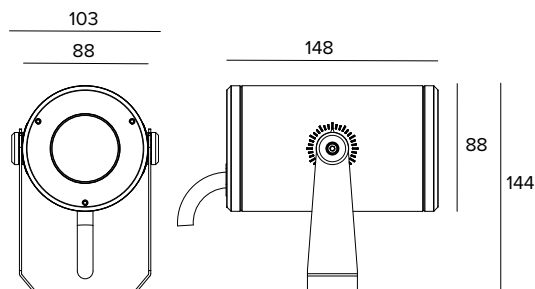

The figures on the drawing are expressed in mm.

SOURCE

RGBW light module made of RGBW LED multichip. Color temperature of the white source: 6500K.

Energy efficiency class: F

Nominal power: 11,4W

Nominal flux: See photometries

CCT nominal: See photometries

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Equipped with precision methacrylate lens and spreader filter.

Optic: LENS

Beam angles: MWFL

Optical efficiency: 77%

Fixture flux: See photometries

Luminous efficacy: See photometries

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Painted die-cast anodised aluminium body and painted stainless steel mounting bracket. Tempered extra clear front glass.

Colour and finish: Ferrite

Weight: 1Kg

Degree of protection: IP66

Mechanical Resistance: IK10

ELECTRICAL CHARACTERISTICS

Remote DMX-RDM electronic driver with 4 independent constant current outputs. The driver is housed inside an IP68 box and allows to control from 1 to 4 fixtures. Controlled using DMX-RDM protocols that make it possible to programme the fixture remotely (no dip-switch) using the DMX data line. Programming the fixtures is done using the USB-RDM programmer that is available as an accessory. All versions are pre-wired with a 1.5m long 8-pole feeding cable (to be connected to the IP68 driver box).

Fixture Power: See photometries

Power supply: 850mA

Insulation Class: CLASS 3

Driver included: NO

Ambient temperature: -25°C / +35°C

INSTALLATION

Mounting bracket with aiming adjustability. Adjustable up to $\pm 60^\circ$ on the horizontal pane and $+90^\circ/-45^\circ$ on the vertical plane.

NOTES

Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. It is possible to subject the product to Cataphoresis treatment on request. 110-277Vac version available on request. Photometrics show the maximum emission values of fixtures. Values related to the power consumption of the fixture do not take into account the consumption of the accessory driver, which depends on the choice of driver. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

1E4048 | DART Round Small RGBW

Professional adjustable LED projector



		H(m)	D(m)	Emax(lx)		
	-			44°		
Fixture Power	11W	1	0.80	596		
Source Flux	522lm	2	1.60	149		
Fixture Flux	403lm	3	2.40	66		
Efficacy	35lm/W	4	3.19	37		
TS1667	I _{max} =1140cd/klm	I _{max}	596cd	5	3.99	24




		H(m)	D(m)	Emax(lx)		
	-			44°		
Fixture Power	7W	1	0.80	309		
Source Flux	271lm	2	1.60	77		
Fixture Flux	209lm	3	2.40	34		
Efficacy	32lm/W	4	3.19	19		
TS1667	I _{max} =1140cd/klm	I _{max}	309cd	5	3.99	12

RGBW


Fixture Power	11W
Nominal flux	522lm
Fixture flux	403lm
Luminous efficacy	35lm/W

RGB

Fixture Power	7W
Nominal flux	271lm
Fixture flux	209lm
Luminous efficacy	32lm/W

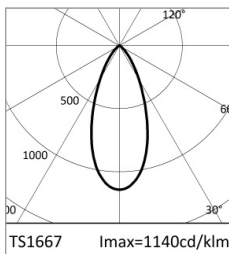

	6500K	H(m)	D(m)	Emax(lx)		
	-			44°		
Fixture Power	3W	1	0.80	327		
Source Flux	287lm	2	1.60	82		
Fixture Flux	221lm	3	2.40	36		
Efficacy	71lm/W	4	3.19	20		
TS1667	I _{max} =1140cd/klm	I _{max}	327cd	5	3.99	13

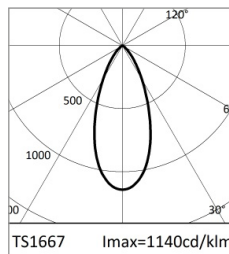


		H(m)	D(m)	Emax(lx)		
	-			44°		
Fixture Power	2W	1	0.80	121		
Source Flux	106lm	2	1.60	30		
Fixture Flux	82lm	3	2.40	13		
Efficacy	36lm/W	4	3.19	8		
TS1667	I _{max} =1140cd/klm	I _{max}	121cd	5	3.99	5

WHITE


CCT nominal	6500K
Fixture Power	3W
Nominal flux	287lm
Fixture flux	221lm
Luminous efficacy	71lm/W

RED

Fixture Power	2W
Nominal flux	106lm
Fixture flux	82lm
Luminous efficacy	36lm/W

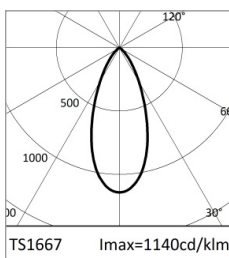

		H(m)	D(m)	Emax(lx)		
	-			44°		
Fixture Power	3W	1	0.80	218		
Source Flux	191lm	2	1.60	54		
Fixture Flux	147lm	3	2.40	24		
Efficacy	45lm/W	4	3.19	14		
TS1667	I _{max} =1140cd/klm	I _{max}	218cd	5	3.99	9

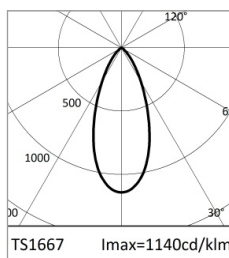

		H(m)	D(m)	Emax(lx)		
	-			44°		
Fixture Power	3W	1	0.80	42		
Source Flux	37lm	2	1.60	11		
Fixture Flux	29lm	3	2.40	5		
Efficacy	10lm/W	4	3.19	3		
TS1667	I _{max} =1140cd/klm	I _{max}	42cd	5	3.99	2

GREEN

Fixture Power	3W
Nominal flux	191lm
Fixture flux	147lm
Luminous efficacy	45lm/W

BLUE

Fixture Power	3W
Nominal flux	37lm
Fixture flux	29lm
Luminous efficacy	10lm/W

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process. Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656



1E4048 | DART Round Small RGBW

Professional adjustable LED projector

Related codes

Power Supply

Code
1E3883

DMX 4 channel driver - 850mA.
50W, LxHxP=220x80x120mm, 120-277Vac.
IP68 gray powder coated aluminum box.

Accessories

Filter



Colour	Code
	1E4002

Blade of light filter.
PMMA holographic filter for a blade of light effect.
Completed with powder coated aluminum alloy holder ring.

Grid



Colour	Code
	1E4005

Anti-glare louver.
The central elements can be adjusted +/- 60° for a perfect glare control.
Powder coated stainless steel.

Screen



Colour	Code
	1E4003

Asymmetric screen.
Powder coated stainless steel.



Colour	Code
	1E4004

Cylindrical screen.
Powder coated stainless steel.
Short version.



Colour	Code
	1E4057

Cylindrical screen.
Powder coated stainless steel.
Long version.

Mounting System



Colour	Code
	1E3015

Plate for fixture rotation.
Powder coated stainless steel.



Dimensions ØxH mm	Colour	Code
70x182		1E3016

Earthspike.
Powder coated stainless steel.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656



1E4048 | DART Round Small RGBW Professional adjustable LED projector

Control systems



Code

1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the "RDM Targetti" software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.
The USB-RDM programmer manages to direct DMX-RDM fixtures if there are no BUFFER or Splitter DMXs on the section.
Please refer to the instructions for more details.



Code

A077

my-SCENARIO Show Store.
Programmable DMX interface that integrates the latest innovations in lighting control in architectural and entertainment applications.
It features USB Type-C and Ethernet ports for programming and remote control.
The unit can be fully programmed with ESA Pro 2 software (available for Windows and Mac users) or via mobile applications such as Arcolis (available for iOS or Android devices).
It can be fully customised: pixel mapping, triggering management, patch configuration and much more.
The system offers great possibilities for the control of your lighting installation: multi zone control (allowing the management of up to 5 independent zones), extended triggers (time/date, Sunrise/Sunset, input ports, TCP/UDP commands), 16-bit channels management, full recovery after power loss, up to 99 total scenes, and 1024+ DMX channels.
The intuitive backlit keyboard comes with 10 preset buttons for a user friendly experience.



Code

1T6499

myScenario Wall.
DMX controller with a glass touch sensitive screen for architectural applications.
It can control two different DMX universes (2x 512 channels).
Stand alone function or connected to a computer using a USB port.
Software for creating scenarios (that can be downloaded from the Targetti website) included.
It can manage 10 different lighting zones and 50 scenarios per zone.
The touch keys on the front make it possible to modify and recall programmed scenarios.
USB cable included.
To be used with all RGBW products.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A.: FI-275656

TARGETTI