



1E4051 | DART Round Medium RGBW

Professional adjustable LED projector



The fixture's photometric values can be found on the following pages

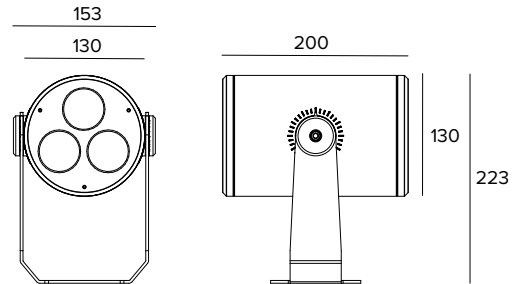

The figures on the drawing are expressed in mm.

SOURCE

RGBW light module made of RGBW LED multichip. Color temperature of the white source: 6500K.

Energy efficiency class: F

Nominal power: 33W

Nominal flux: See photometries

CCT nominal: See photometries

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Equipped with precision methacrylate lenses and spreader filter.

Optic: LENS

Beam angles: MWFL

Optical efficiency: 68%

Fixture flux: See photometries

Luminous efficacy: See photometries

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Painted die-cast anodised aluminium body and painted stainless steel mounting bracket. Tempered extra clear front glass.

Colour and finish: Ferrite

Weight: 3.35Kg

Degree of protection: IP66

Mechanical Resistance: IK10

ELECTRICAL CHARACTERISTICS

Remote DMX-RDM electronic driver with 4 independent constant current outputs. The driver is housed inside an IP68 box and allows to control 1 fixture. Controlled using DMX-RDM protocols that make it possible to programme the fixture remotely (no dip-switch) using the DMX data line. Programming the fixtures is done using the USB-RDM programmer that is available as an accessory. All versions are pre-wired with a 1.5m long 8-pole feeding cable (to be connected to the IP68 driver box).

Fixture Power: See photometries

Power supply: 850mA

Insulation Class: CLASS 3

Driver included: NO

Ambient temperature: -25°C / +35°C

INSTALLATION

Mounting bracket with aiming adjustability. Adjustable up to $\pm 45^\circ$ on the horizontal plane and $+90^\circ/-45^\circ$ on the vertical plane.

NOTES

Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. It is possible to subject the product to Cataphoresis treatment on request. 110-277Vac version available on request. Photometrics show the maximum emission values of fixtures. Values related to the power consumption of the fixture do not take into account the consumption of the accessory driver, which depends on the choice of driver. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).


We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

1E4051 | DART Round Medium RGBW
Professional adjustable LED projector

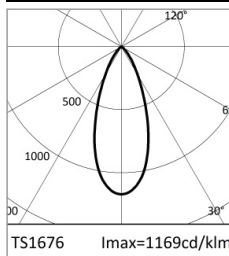

		H(m)	D(m)	Emax(lx)		
			40°			
Fixture Power	33W	1	0.74	1831		
Source Flux	1567lm	2	1.48	458		
Fixture Flux	1063lm	3	2.21	203		
Efficacy	32lm/W	4	2.95	114		
TS1676	I _{max} =1169cd/klm	I _{max}	1831cd	5	3.69	73



		H(m)	D(m)	Emax(lx)		
			40°			
Fixture Power	25W	1	0.74	951		
Source Flux	814lm	2	1.48	238		
Fixture Flux	552lm	3	2.21	106		
Efficacy	22lm/W	4	2.95	59		
TS1676	I _{max} =1169cd/klm	I _{max}	951cd	5	3.69	38

RGBW


Fixture Power	33W
Nominal flux	1567lm
Fixture flux	1063lm
Luminous efficacy	32lm/W

RGB

Fixture Power	25W
Nominal flux	814lm
Fixture flux	552lm
Luminous efficacy	22lm/W



	6500K	H(m)	D(m)	Emax(lx)		
			40°			
Fixture Power	9W	1	0.74	1005		
Source Flux	860lm	2	1.48	251		
Fixture Flux	584lm	3	2.21	112		
Efficacy	68lm/W	4	2.95	63		
TS1676	I _{max} =1169cd/klm	I _{max}	1005cd	5	3.69	40

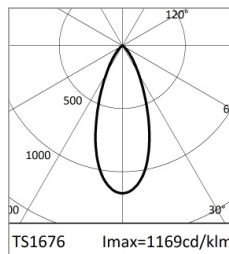


		H(m)	D(m)	Emax(lx)		
			40°			
Fixture Power	7W	1	0.74	372		
Source Flux	318lm	2	1.48	93		
Fixture Flux	216lm	3	2.21	41		
Efficacy	33lm/W	4	2.95	23		
TS1676	I _{max} =1169cd/klm	I _{max}	372cd	5	3.69	15

WHITE

CCT nominal	6500K
Fixture Power	9W
Nominal flux	860lm
Fixture flux	584lm
Luminous efficacy	68lm/W

RED

Fixture Power	7W
Nominal flux	318lm
Fixture flux	216lm
Luminous efficacy	33lm/W

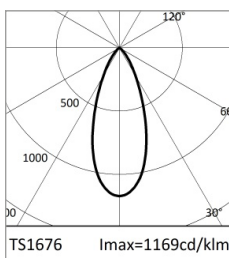

		H(m)	D(m)	Emax(lx)		
			40°			
Fixture Power	10W	1	0.74	670		
Source Flux	573lm	2	1.48	167		
Fixture Flux	389lm	3	2.21	74		
Efficacy	39lm/W	4	2.95	42		
TS1676	I _{max} =1169cd/klm	I _{max}	670cd	5	3.69	27



		H(m)	D(m)	Emax(lx)		
			40°			
Fixture Power	9W	1	0.74	131		
Source Flux	112lm	2	1.48	33		
Fixture Flux	76lm	3	2.21	15		
Efficacy	9lm/W	4	2.95	8		
TS1676	I _{max} =1169cd/klm	I _{max}	131cd	5	3.69	5

GREEN

Fixture Power	10W
Nominal flux	573lm
Fixture flux	389lm
Luminous efficacy	39lm/W

BLUE

Fixture Power	9W
Nominal flux	112lm
Fixture flux	76lm
Luminous efficacy	9lm/W

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process. Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656



1E4051 | DART Round Medium RGBW

Professional adjustable LED projector

Related codes

Power Supply

Code

1E3883

DMX 4 channel driver - 850mA.
50W, LxHxP=220x80x120mm, 120-277Vac.
IP68 gray powder coated aluminum box.

Accessories

Filter



Colour

Code

**1E4263**

Blade of light filter.
PMMA holographic filter for a blade of light effect.
Completed with powder coated aluminum alloy holder ring.

Screen



Colour

Code

**1E4007**

Asymmetric screen.
Powder coated stainless steel.




Colour

Code

**1E4008**

Cylindrical screen.
Powder coated stainless steel.
Short version.



Colour

Code

**1E4058**

Cylindrical screen.
Powder coated stainless steel.
Long version.

Mounting System



Colour

Code

**1E3026**

Plate for fixture rotation.
Powder coated stainless steel.

Dimensions
ØxH mm

Colour

Code

96x182

**1E3028**

Earthspike.
Powder coated stainless steel.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A.: FI-275656

TARGETTI

1E4051 | DART Round Medium RGBW Professional adjustable LED projector

Mounting System



Colour Code

● 1E2825

Pole bracket.
Anodised and powder coated aluminium.
Pole Ø 60mm (+/-2mm).



Colour Code

● 1E3027

Pole multiple mounting system.
Powder coated stainless steel.
To be completed with 1E2825.
Max 4 projectors.

Control systems



Code

1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the "RDM Targetti" software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.
The USB-RDM programmer manages to direct DMX-RDM fixtures if there are no BUFFER or Splitter DMXs on the section.
Please refer to the instructions for more details.



Code

A077

my-SCENARIO Show Store.
Programmable DMX interface that integrates the latest innovations in lighting control in architectural and entertainment applications.
It features USB Type-C and Ethernet ports for programming and remote control.
The unit can be fully programmed with ESA Pro 2 software (available for Windows and Mac users) or via mobile applications such as Arcolis (available for iOS or Android devices).
It can be fully customised: pixel mapping, triggering management, patch configuration and much more.
The system offers great possibilities for the control of your lighting installation: multi zone control (allowing the management of up to 5 independent zones), extended triggers (time/date, Sunrise/Sunset, input ports, TCP/UDP commands), 16-bit channels management, full recovery after power loss, up to 99 total scenes, and 1024+ DMX channels.
The intuitive backlit keyboard comes with 10 preset buttons for a user friendly experience.



Code

1T6499

myScenario Wall.
DMX controller with a glass touch sensitive screen for architectural applications.
It can control two different DMX universes (2x 512 channels).
Stand alone function or connected to a computer using a USB port.
Software for creating scenarios (that can be downloaded from the Targetti website) included.
It can manage 10 different lighting zones and 50 scenarios per zone.
The touch keys on the front make it possible to modify and recall programmed scenarios.
USB cable included.
To be used with all RGBW products.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

