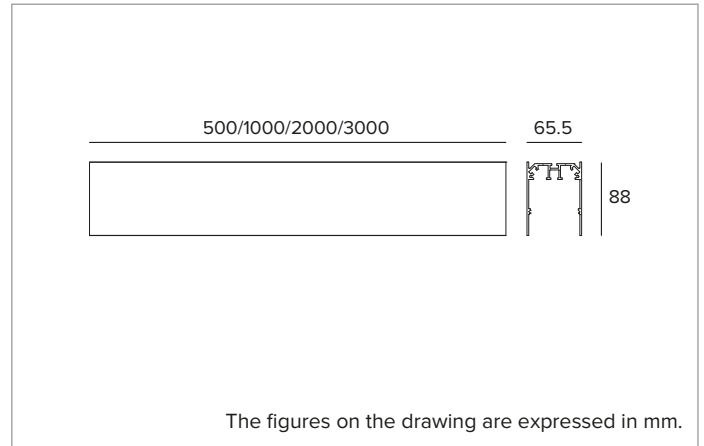

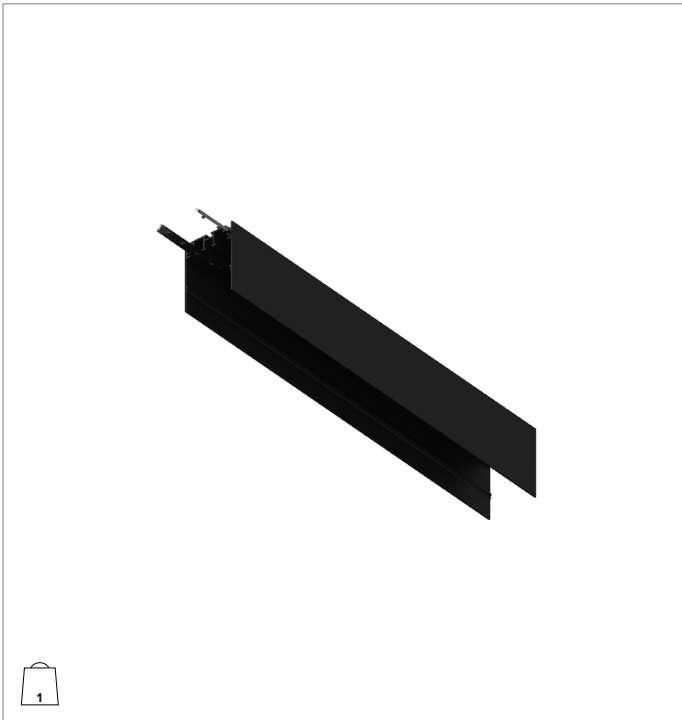


1E4151 | IVY Profile**Surface installation profile for ceiling/wall mounting needed for the installation of the lighting modules****MECHANICAL CHARACTERISTICS**

Extruded aluminum profile protected with a layer of black anodization with a minimum thickness of 15 μ .

Colour and finish: Black anodized

Dimensions: L=500mm

Weight: 1Kg

Version: SURFACE

NOTES

Linear connection joint already included in the packaging. Extruded plastic aesthetic cover available as accessory.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.


Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A.: FI-275656

TARGETTI

1E4151 | IVY Profile

Surface installation profile for ceiling/wall mounting needed for the installation of the lighting modules

Related codes**End Caps**

Colour	Code
	1E4167


End caps made of 2 pieces.
For surface mounted installation profile.

Accessories**Mechanical connector**

Colour	Code
	1E4172

L shaped joint planar.
For surface mounted installation profile.



Colour	Code
	1E4173

L shaped joint concave.
For surface mounted installation profile.



Colour	Code
	1E4174

L shaped joint convex.
For surface mounted installation profile.

Cover Panel

L mm	Colour	Code
2000		1E4170

Extruded plastic cover.

Suspension

L mm	Colour	Code
2000		2T0049

Suspension cable.
For indoor environment only.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.


Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

1E4151 | IVY Profile
Surface installation profile for ceiling/wall mounting needed for the installation of the lighting modules

Power Supply Kit



L mm	Driver	Colour	Code
4000	ON-OFF	●	1T5906EL

Suspension installation kit: power cable complete with a painted polycarbonate rosette.
 Max 0.6kW.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
 Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
 Via Pratese, 164
 50145 Firenze - Italy
 Tel: +39 055 37911
 targetti.com
 targetti@targetti.com

CCIAA Firenze
 Share Capital:
 € 500.000,00
 VAT N. (IT):
 01537660480
 R.E.A: FI-275656

