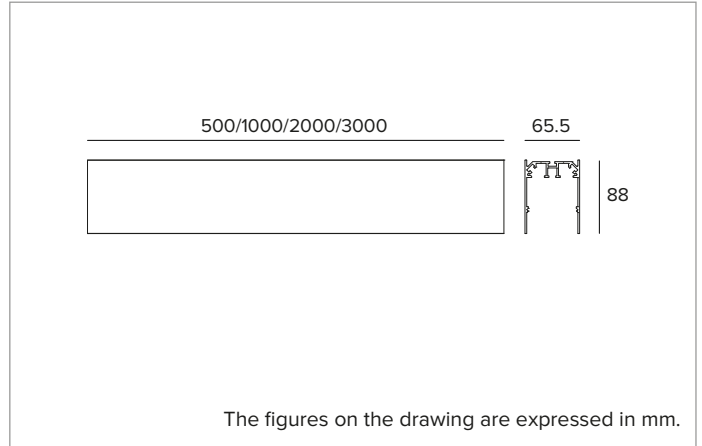
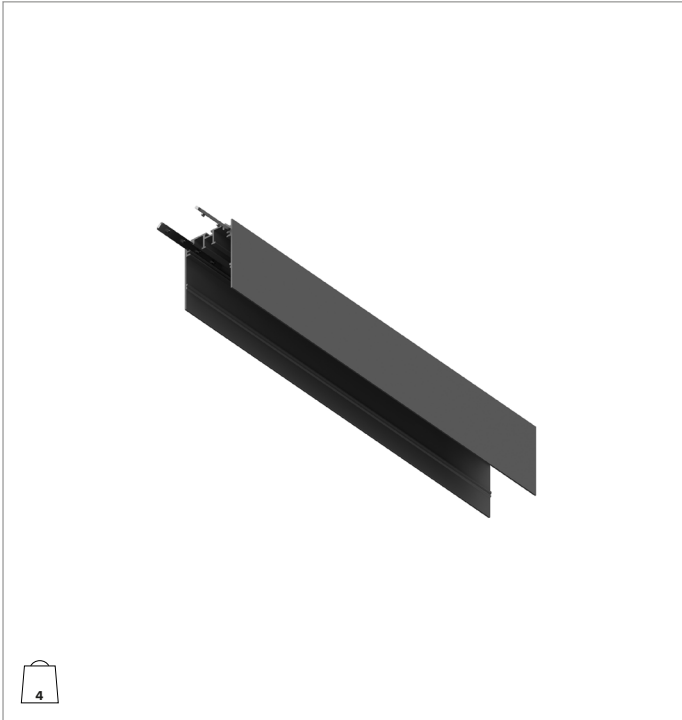


**1E4157 | IVY Profile****Surface installation profile for ceiling/wall mounting needed for the installation of the lighting modules****MECHANICAL CHARACTERISTICS**

Extruded aluminum profile protected with a layer of black anodization with a minimum thickness of 15 $\mu$  and powder painting in Ferrite grey color.

**Colour and finish:** Ferrite

**Dimensions:** L=2000mm

**Weight:** 4Kg

**Version:** SURFACE

**NOTES**

Linear connection joint already included in the packaging. Extruded plastic aesthetic cover available as accessory.

**WARRANTY**

5 years.

**WARNING**

Luminaire designed for disposal/recycling at end-of-life.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.*


*Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

*We reserve the right to make technical changes.*

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A.: FI-275656

**TARGETTI**

**1E4157 | IVY Profile****Surface installation profile for ceiling/wall mounting needed for the installation of the lighting modules****Related codes****End Caps**

Colour      Code

●      **1E4168**

End caps made of 2 pieces.  
For surface mounted installation profile.

**Accessories****Mechanical connector**

Colour      Code

●      **1E4176**

L shaped joint planar.  
For surface mounted installation profile.



Colour      Code

●      **1E4177**

L shaped joint concave.  
For surface mounted installation profile.



Colour      Code

●      **1E4178**

L shaped joint convex.  
For surface mounted installation profile.

**Cover Panel**

L mm      Colour      Code

2000      ●      **1E4170**

Extruded plastic cover.

**Suspension**

L mm      Colour      Code

2000      ●      **2T0049**

Suspension cable.  
For indoor environment only.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.


Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**

**1E4157 | IVY Profile****Surface installation profile for ceiling/wall mounting needed for the installation of the lighting modules****Power Supply Kit**

L mm	Driver	Colour	Code
4000	ON-OFF	●	<b>2T0048EL</b>

Suspension installation kit: power cable complete with a painted polycarbonate rosette.  
Max 0.6kW.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.*

*Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

*We reserve the right to make technical changes.*

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**