
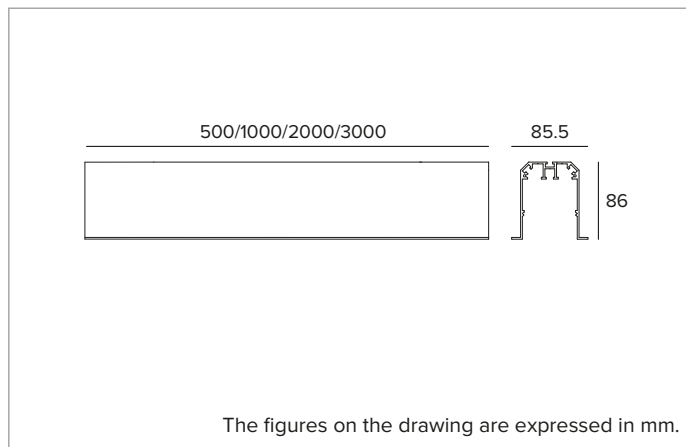


**1E4160 | IVY Profile**

Recessed installation profile for ceiling/wall mounting needed for the installation of the lighting modules



2.15

**MECHANICAL CHARACTERISTICS**

Extruded aluminum profile protected with a layer of black anodization with a minimum thickness of 15 $\mu$ .

**Colour and finish:** Black anodized

**Dimensions:** L=1000mm

**Weight:** 2.15Kg

**Version:** RECESSED

**NOTES**

Linear connection joint already included in the packaging. Extruded plastic aesthetic cover available as accessory.

**WARRANTY**

5 years.

**WARNING**

Luminaire designed for disposal/recycling at end-of-life.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**

**1E4160 | IVY Profile**

Recessed installation profile for ceiling/wall mounting needed for the installation of the lighting modules

**Related codes****End Caps**


Colour	Code
●	<b>1E4258</b>

End caps made of 2 pieces.  
For trimless installation profile.

**Accessories****Mechanical connector**

Colour	Code
●	<b>1E4259</b>

L shaped joint planar.  
For trimless installation profile.



Colour	Code
●	<b>1E4260</b>

L shaped joint concave.  
For trimless installation profile.



Colour	Code
●	<b>1E4261</b>

L shaped joint convex.  
For trimless installation profile.

**Cover Panel**

L mm	Colour	Code
2000	●	<b>1E4170</b>

Extruded plastic cover.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**