
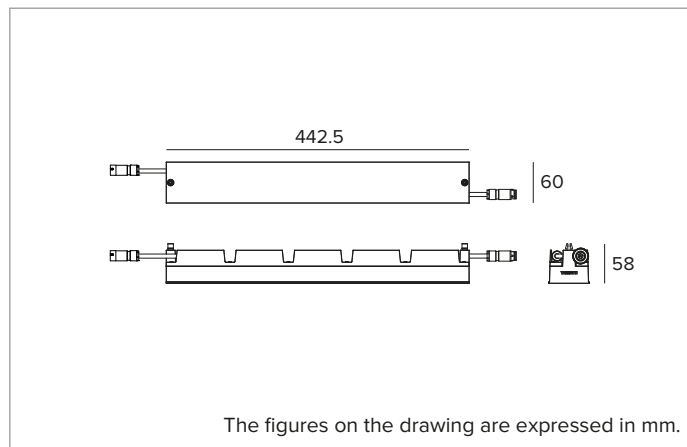


1E4262 | IVY Audio Speaker Master Module

Audio Speaker Master Module



MECHANICAL CHARACTERISTICS

Audio player with “net streaming” capability, equipped with integrated power amplifier and speakers. The unit consists of an electronic circuit, two exciters and a traditional loudspeaker housed inside a thermoplastic polymer box protected by silicone gasket.

Colour and finish: Black anodized

Weight: 0.85Kg

Degree of protection: IP65

ELECTRICAL CHARACTERISTICS

Fixture Power: the unit has a maximum power consumption of 50W peak in condition of maximum volume (Note: The consumption strongly depends on the track being played); consumption in stand-by mode: 1W. Audio frequency range: 100 Hz - 18 KHz. VLAN standard: IEEE 802.11 b/g/n, Wi-Fi compliant. Wi-Fi frequency: 2.4GHz o 5GHz. Maximum working distance on wi-fi: 80m (in open air). Connectivity: Bluetooth version 5.1. Streaming protocols supported: Spotify Connect, DLNA and QPlay protocol. Music contents supported: “iHeartRadio, Napster/ Rhapsody, Tidal, Deezer, vTune, Qobuz, Audible, Radio.de, NPR, Ximalaya, Qingting FM, QQ FM, Douban FM inside”. Multiroom services supported: Spotify, Bluetooth. Music format supported: “HTTP/HTTPS/RTSP/MMS/ TS protocol - HLS/ASX/M3U playlist format - MP3/AAC/FLAC/ALAC/WMA/ APE/OGG codec”. BT profiles supported: A2DP, AVRCP, HFP, HID profiles, Support BLE, Support EDR. Multiroom max: 5 devices. iOS operating systems: ≥ iOS6.1. Suggested ≥ iOS10. Android operating systems: ≥ Android 4.3.3.

Power supply: 48Vdc

Insulation Class: CLASS 3

Ambient temperature: -10°C / +50°C

INSTALLATION

Fast connection system of the modules through anodized aluminium clips. Free positioning all over the installation profile according to installation needs with mechanical lock through Hex Key. Designed for connection in series through H05RN-F (0.15m + 0.15m) cable completed with male/ female miniaturised IP65 connectors.

NOTES

Controlled via wi-fi (DLNA) by a special 4STREAM app available for iOS or ANDROID mobile devices.

WARRANTY

2 years.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI