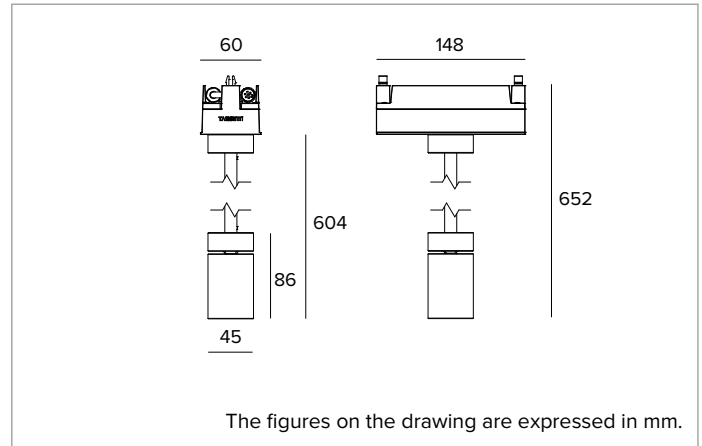


**1E4292EL | IVY Stem mounted projector****Adjustable LED 1x light module with rigid suspension, powered at low voltage, to be installed into the installation profile**

	4000K	H(m)	D(m)	E <sub>max</sub> (lx)
	Ra90		8°	
Fixture Power	4W	1	0.13	5789
Source Flux	362lm	2	0.26	1447
Fixture Flux	235lm	3	0.39	643
Efficacy	56lm/W	4	0.53	362
TS1719 I <sub>max</sub> =16015cd/klm	I <sub>max</sub> = 5789cd	5	0.66	232

**SOURCE**

Emitter Ra90.  
**Energy efficiency class:** F  
**Nominal power:** 3,8W  
**Nominal flux:** 362lm  
**Colour rendering index:** 90  
**Rf:** 93  
**Rg:** 101  
**CCT nominal:** 4000K  
**Lifetime (L80/B10):** >50000h tq +25°C

**ILLUMINOTECHNICAL CHARACTERISTICS**

NSP beam. Optics made of a lens in optical grade PMMA and a holographic diffusion filter.

**Optic:** LENS  
**Beam angles:** NSP  
**Optical efficiency:** 65%  
**Fixture flux:** 235lm  
**Luminous efficacy:** 56lm/W  
**Photobiological safety:** Compliant with RG1 low risk group

**MECHANICAL CHARACTERISTICS**

Cylindrical aluminium body obtained through CNC machining process and protected with a layer of black anodization with a minimum thickness of 15µ. Tempered extra clear front glass. Aluminium joint with locking system and rigid suspension in black anodized aluminium. Adjustability of the optical unit of 90° on the vertical plane (friction locking system) and 355° on the horizontal plane with the possibility of mechanical aiming locking through no tools system. Electronic components hosted inside a polymeric plastic box sealed by a silicone rubber gasket.

**Colour and finish:** Black anodized  
**Dimensions:** L=148mm  
**Weight:** 0.52Kg  
**Version:** ON-OFF  
**Degree of protection:** IP65

**ELECTRICAL CHARACTERISTICS**

**Fixture Power:** 4W  
**Power supply:** 48Vdc  
**Insulation Class:** CLASS 3  
**Class F:** YES  
**Ambient temperature:** -25°C / +35°C

**INSTALLATION**

Fast connection system of the modules through anodized aluminium clips. Free positioning all over the installation profile according to installation needs with mechanical lock through Hex Key. Designed for connection in series through H05RN-F (0.15m + 0.15m) cable completed with male/female miniaturised IP65 connectors.

**NOTES**

Electronic ON-OFF version.

**WARRANTY**

5 years.

**WARNING**

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.*

*Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

*We reserve the right to make technical changes.*

Targetti Sankey S.r.l.  
 Via Pratese, 164  
 50145 Firenze - Italy  
 Tel: +39 055 37911  
 targetti.com  
 targetti@targetti.com

CCIAA Firenze  
 Share Capital:  
 € 500.000,00  
 VAT N. (IT):  
 01537660480  
 R.E.A.: FI-275656

**TARGETTI**

**1E4292EL | IVY Stem mounted projector**  
Adjustable LED 1x light module with rigid suspension, powered at low voltage, to be installed into the installation profile

**Related codes**

**Power Supply**



Driver	Colour	Code
ON-OFF	●	<b>1E4169</b>

48Vdc driver box (IP65).  
L=450mm 90W.  
Equipped with connection cable H05RN-F (0.15m + 0.15m) complete with male/female IP65 connectors for 220V and miniaturized female IP65 connector for 48V.



Driver	Colour	Code
ON-OFF	●	<b>1E4175</b>

48Vdc driver box (IP65).  
L=450mm 150W.  
Equipped with connection cable H05RN-F (0.15m + 0.15m) complete with male/female IP65 connectors for 220V and miniaturized female IP65 connector for 48V.

**Power Supply**

Dimensions LxHxP mm	Power	Power supply	Output voltage	IP	Code
225x51x65	70W	220-240Vac	48Vdc	IP67	<b>1E2320</b>
225x51x65	150W	220-240Vac	48Vdc	IP67	<b>1E2321</b>

Electronic ON-OFF power supply.  
Cable length 0.5m (IN and OUT).  
To be completed with Connection kit 1E4184.

Dimensions LxHxP mm	Power	Power supply	Output voltage	IP	Code
225x36x60	60W	220-240Vac	48Vdc	IP20	<b>1T6917EL</b>
240x49x60	130W	220-240Vac	48Vdc	IP20	<b>1T6916EL</b>

Electronic ON-OFF power supply.  
To be completed with Connection kit 1E4184.

**Accessories**

**Cable**



L mm	Code
500	<b>1E4270</b>
1000	<b>1E4181</b>
2000	<b>1E4182</b>
3000	<b>1E4183</b>

Connection cable complete with male/female connectors.

**Tool**



Code
<b>1E4171</b>

Microcrewdriver with hexagonal head (diameter 0.9mm) for wiring 1E4184 connection kit.

**Connector**



Code
<b>1E4184</b>

Connection kit 24/48V.  
Wire not included.  
Maximum cable diameter 7.5mm.  
To be used for lengths >3m.



Code
<b>1E2769</b>

Linear connection box IP66/IP68.  
5 poles max. wire section 1.5mm<sup>2</sup>.  
Cable diameter range from 7 to 12mm.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

