



## 1T4193 | SLIM Wall

Wall mounted fixture with direct/indirect light emission for LED sources

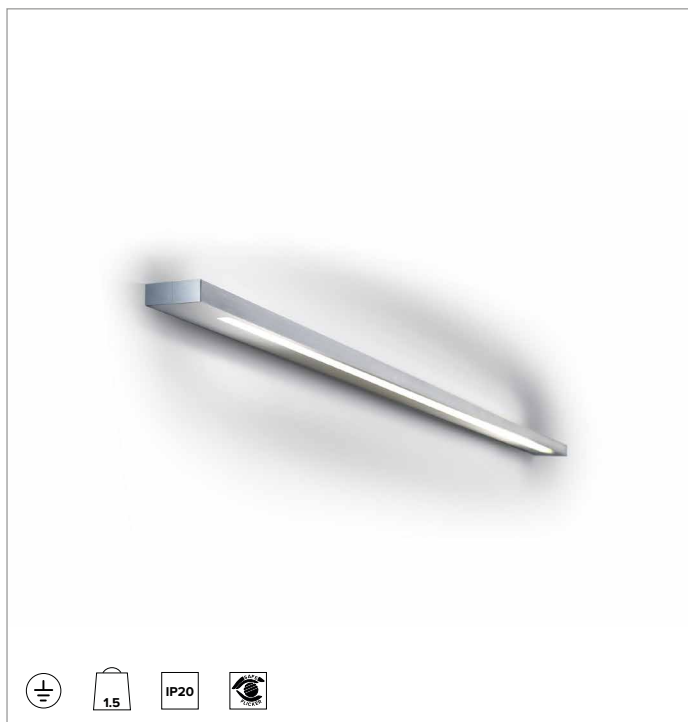

		3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
		Ra80	88°	95°			
Fixture Power	28W	1	1.91	2.19	501		
Source Flux	3440lm	2	3.83	4.38	125		
Fixture Flux	2566lm	3	5.74	6.56	56		
Efficacy	92lm/W	4	7.66	8.75	31		
TS752	I <sub>max</sub> =147cd/klm	I <sub>max</sub>	504cd	5	9.57	10.94	20

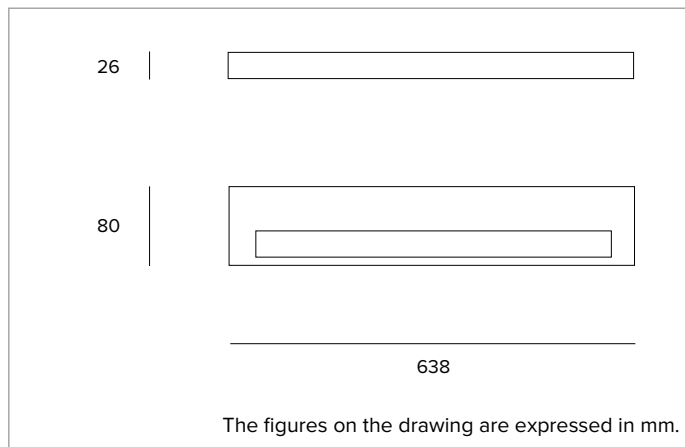

### SOURCE

Linear Low Power High Efficiency LED board Ra80.

**Energy efficiency class:** D

**Nominal power:** 24W

**Nominal flux:** 3440lm

**Colour rendering index:** 80

**Rf:** 82.9

**Rg:** 97

**CCT nominal:** 3000K

**SDCM:** 2

**Lifetime (L80/B10):** >50000h tq +25°C

### ILLUMINOTECHNICAL CHARACTERISTICS

**Emission:** DIRECT/INDIRECT

**Beam angles:** VWFL

**Optical efficiency:** 75%

**Fixture flux:** 2566lm

**Luminous efficacy:** 92lm/W

**Photobiological safety:** Compliant with RG1 low risk group

### MECHANICAL CHARACTERISTICS

Extruded anodised aluminium body Transparent polycarbonate upper safety screen. Ribbed, extruded opal polycarbonate lower diffusive screen. Polycarbonate lateral end caps.

**Colour and finish:** Aluminium

**Dimensions:** L=638mm

**Weight:** 1.5Kg

**Degree of protection:** IP20

### ELECTRICAL CHARACTERISTICS

Integrated electronic power supply. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

**Fixture Power:** 28W

**Power supply:** 220-240Vac 50/60Hz

**Insulation Class:** CLASS 1

**Type of driver / Control:** ON-OFF

**Driver included:** YES

**Class F:** YES

**SAFE FLICKER:** PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

**Ambient temperature:** 0°C / +25°C

### NOTES

Design Daniel Bernard.

### WARRANTY

5 years.

### WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.*

*Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

*We reserve the right to make technical changes.*

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**