




1T4195 | SLIM Wall

Wall mounted fixture with direct/indirect light emission for LED sources

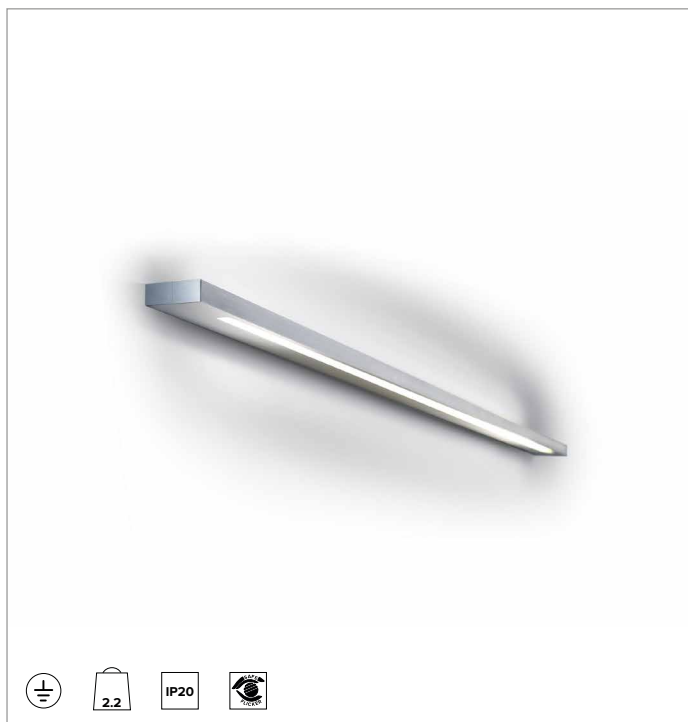

| | | 3000K | H(m) | D1(m) | D2(m) | E _{max} (lx) |
|---------------|-----------------------------|------------------|--------|-------|-------|-----------------------|
| | | Ra80 | 88° | 95° | | |
| Fixture Power | 56W | 1 | 1.91 | 2.19 | 1002 | |
| Source Flux | 6880lm | 2 | 3.83 | 4.38 | 250 | |
| Fixture Flux | 5133lm | 3 | 5.74 | 6.56 | 111 | |
| Efficacy | 92lm/W | 4 | 7.66 | 8.75 | 63 | |
| TS752 | I _{max} =147cd/klm | I _{max} | 1009cd | 5 | 9.57 | 10.94 40 |

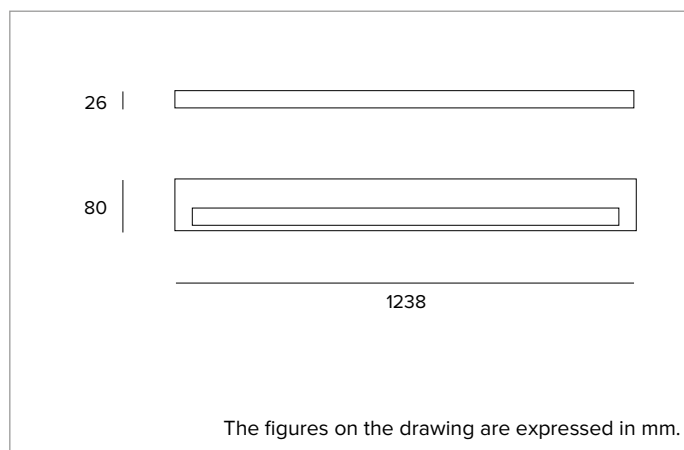

SOURCE

Linear Low Power High Efficiency LED board Ra80.

Energy efficiency class: D

Nominal power: 48W

Nominal flux: 6880lm

Colour rendering index: 80

Rf: 82.9

Rg: 97

CCT nominal: 3000K

SDCM: 2

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Emission: DIRECT/INDIRECT

Beam angles: VWFL

Optical efficiency: 75%

Fixture flux: 5133lm

Luminous efficacy: 92lm/W

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Extruded anodised aluminium body Transparent polycarbonate upper safety screen. Ribbed, extruded opal polycarbonate lower diffusive screen. Polycarbonate lateral end caps.

Colour and finish: Aluminium

Dimensions: L=1238mm

Weight: 2.2Kg

Degree of protection: IP20

ELECTRICAL CHARACTERISTICS

Integrated electronic power supply. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power: 56W

Power supply: 220-240Vac 50/60Hz

Insulation Class: CLASS 1

Type of driver / Control: ON-OFF

Driver included: YES

Class F: YES

SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

Ambient temperature: 0°C / +25°C

NOTES

Design Daniel Bernard.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI