



## 1T4499CA90 | HALL

Wall mounted fixture with indirect light emission for LED sources

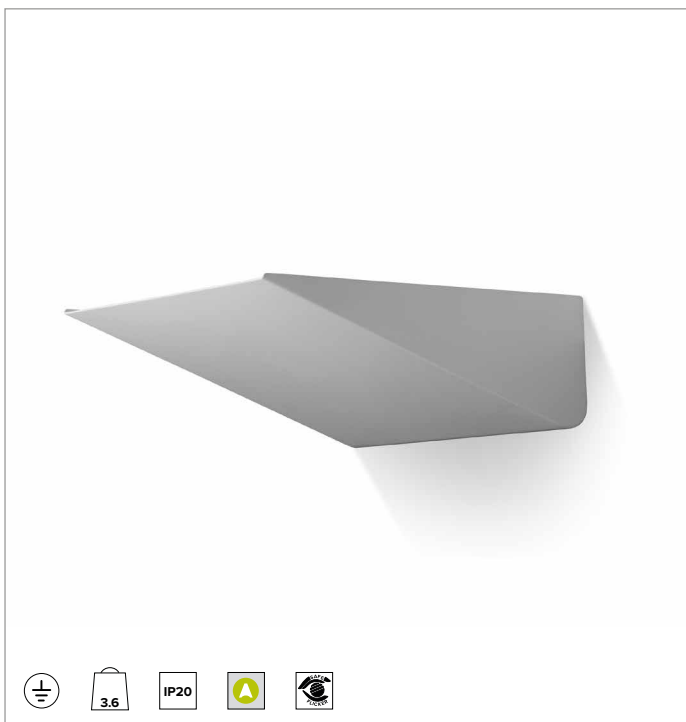

	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)		
	Ra90		121°	89°			
Fixture Power	40W	1	3.52	4.23	1396		
Source Flux	4314lm	2	7.04	8.47	349		
Fixture Flux	3722lm	3	10.56	12.70	155		
Efficacy	93lm/W	4	14.08	16.93	87		
TS1478	I <sub>max</sub> =487cd/klm	I <sub>max</sub>	2099cd	5	17.60	21.17	56

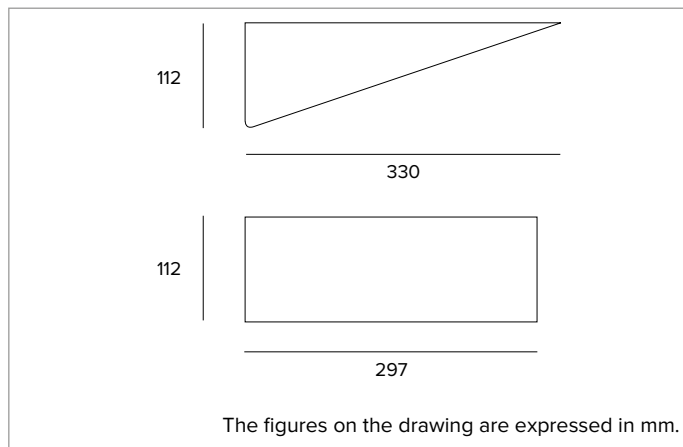

### SOURCE

Linear Low Power High Efficiency LED board Ra90.

**Energy efficiency class:** E

**Nominal power:** 36W

**Nominal flux:** 4314lm

**Colour rendering index:** 90

**Rf:** 91.4

**Rg:** 100.8

**CCT nominal:** 3000K

**Lifetime (L80/B10):** >50000h tq +25°C

### ILLUMINOTECHNICAL CHARACTERISTICS

A high reflectance anodised aluminium reflector.

**Emission:** ASYMMETRICAL

**Optical efficiency:** 86%

**Fixture flux:** 3722lm

**Luminous efficacy:** 93lm/W

**Photobiological safety:** Compliant with RG1 low risk group

### MECHANICAL CHARACTERISTICS

Painted metal body. Diffusive protective screen.

**Colour and finish:** Florentine white

**Weight:** 3.6Kg

**Degree of protection:** IP20

### ELECTRICAL CHARACTERISTICS

Casambi control system included in the LOF version. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

**Fixture Power:** 40W

**Power supply:** 220-240Vac 50/60Hz

**Insulation Class:** CLASS 1

**Type of driver / Control:** CASAMBI

**Driver included:** YES

**Class F:** YES

**SAFE FLICKER:** PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

**Ambient temperature:** 0°C / +25°C

### NOTES

Design Daniel Bernard. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

### WARRANTY

5 years.

### WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**