


1T6240EL90 | THREESIXTY

Circular LED fixture for suspension mounted installations



		3000K	H(m)	D(m)	E _{max} (lx)
		Ra90		114°	
Fixture Power	199W	1	3.09	3903	
Source Flux	22556lm	2	6.17	976	
Fixture Flux	14797lm	3	9.26	434	
Efficacy	74lm/W	4	12.35	244	
TS1489	I _{max} =173cd/klm	I _{max}	3903cd	5	15.43

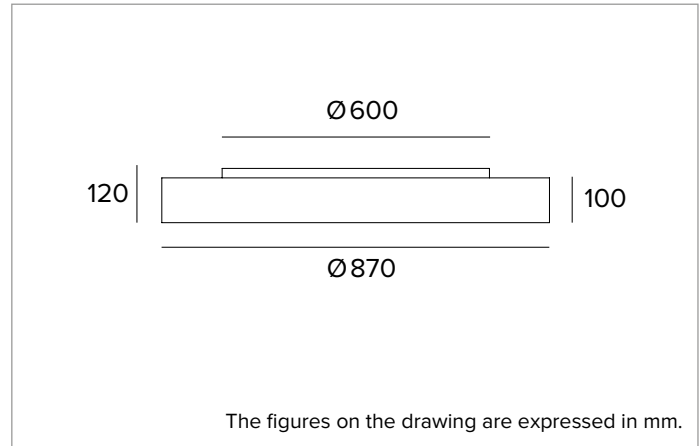

SOURCE

The LED Engine is made up of self-cooling circular boards. Tunable White version available on request.

Energy efficiency class: E
Nominal power: 177W
Nominal flux: 22556lm
Colour rendering index: 90
Rf: 91.4
Rg: 100.8
CCT nominal: 3000K
Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

OPAL Direct/Indirect Version: High luminance transmission and light diffusion opaline polycarbonate lower diffusive screen. Diffused indirect emission LED Chip On Board.

Emission: UP-DOWN OPAL
Optical efficiency: 66%
Fixture flux: 14797lm
Luminous efficacy: 74lm/W
Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Calendered extruded aluminium body.
Colour and finish: Plaster white
Dimensions: D=870mm
Weight: 14Kg
Degree of protection: IP20 for recessed part
Degree of protection: IP40 for exposed part

ELECTRICAL CHARACTERISTICS

Integrated electronic ON-OFF power supply. Emergency Pack available on request. Equipped with a rapid connector for mains connection.

Fixture Power: 199W
Power supply: 220-240Vac 50/60Hz
Insulation Class: CLASS 1
Type of driver / Control: ON-OFF
Driver included: YES
Class F: YES
Ambient temperature: 0°C / +25°C

INSTALLATION

Suspension installation is possible using a special accessory to be ordered separately.

NOTES

DIRECT/INDIRECT VERSION: Fitted with separate switches. Three different light effects available: direct light, indirect light and mixed direct/indirect light. 110-277Vac version available on request.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
 Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
 Via Pratese, 164
 50145 Firenze - Italy
 Tel: +39 055 37911
 targetti.com
 targetti@targetti.com

CCIAA Firenze
 Share Capital:
 € 500.000,00
 VAT N. (IT):
 01537660480
 R.E.A.: FI-275656

TARGETTI

1T6240EL90 | THREESIXTY
Circular LED fixture for suspension mounted installations

Related codes

Suspension



L mm	Colour	Code
2000		1T6282
4000		1T6285

Suspension kit composed of 3 steel cables with an ABS control system.
 Suspension kit compatible with ceiling or wall installations, even inclined.

Power Supply Kit



Driver	Colour	Code
ON-OFF		1T6288EL

Accessory for suspension installation composed of a canopy and 3 or 5 poles complete with a 4000mm power cable.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
 Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
 Via Pratese, 164
 50145 Firenze - Italy
 Tel: +39 055 37911
 targetti.com
 targetti@targetti.com

CCIAA Firenze
 Share Capital:
 € 500.000,00
 VAT N. (IT):
 01537660480
 R.E.A: FI-275656

