



1T6628EL | FORTYEIGHT Logico 30

Low voltage linear LED fixture for track installation

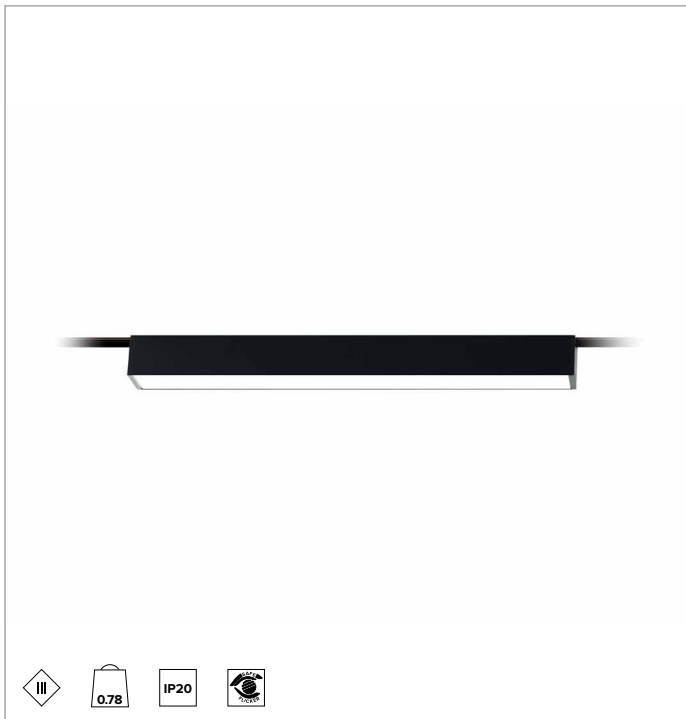

		4000K	H(m)	D(m)	E _{max} (lx)
		Ra90		104°	
Fixture Power	26W	1	2.55	757	
Source Flux	3200lm	2	5.09	189	
Fixture Flux	1992lm	3	7.64	84	
Efficacy	77lm/W	4	10.19	47	
TS1075	I _{max} =237cd/klm	I _{max}	757cd	5	12.74
				30	

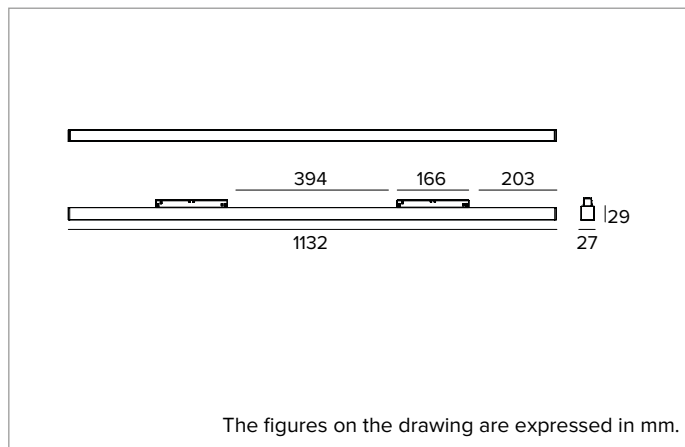

SOURCE

LED Engine made of linear LED boards Ra90. 2700K-3500K on request.

Energy efficiency class: E

Nominal power: 24W

Nominal flux: 3200lm

Colour rendering index: 90

Rf: 89.8

Rg: 98.7

CCT nominal: 4000K

SDCM: 2

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Diffused light: white highly reflective MCPET reflector and opaline polycarbonate Louver screen.

Emission: OPAL

Optical efficiency: 62%

Fixture flux: 1992lm

Luminous efficacy: 77lm/W

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Painted extruded aluminium body available in two different lengths.

Colour and finish: Plaster white

Dimensions: L=1132mm

Weight: 0.78Kg

Version: ON-OFF

Degree of protection: IP20

ELECTRICAL CHARACTERISTICS

Electronic ON-OFF power supply for track.

Fixture Power: 26W

Power supply: 48Vdc

Insulation Class: CLASS 3

Class F: YES

SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

Ambient temperature: 0°C / +25°C

INSTALLATION

Quick coupling system for mounting the product on the track. The trimless deep version of the track allows for hidden installation of fixtures for a flush light effect.

NOTES

Not polarized fixture. 110-277Vac version available on request.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI