



1T7334EL | LOGICO System - Ceiling/Suspension - Projector module

Linear module with adjustable professional LED projectors for ceiling or suspension installation system



	4000K	H(m)	D(m)	E _{max} (lx)		
	Ra90		48°			
Fixture Power	15W	1	0.88	2691		
Source Flux	1964lm	2	1.77	673		
Fixture Flux	1504lm	3	2.65	299		
Efficacy	99lm/W	4	3.53	168		
TS1170	I _{max} =1378cd/klm	I _{max}	2707cd	5	4.41	108

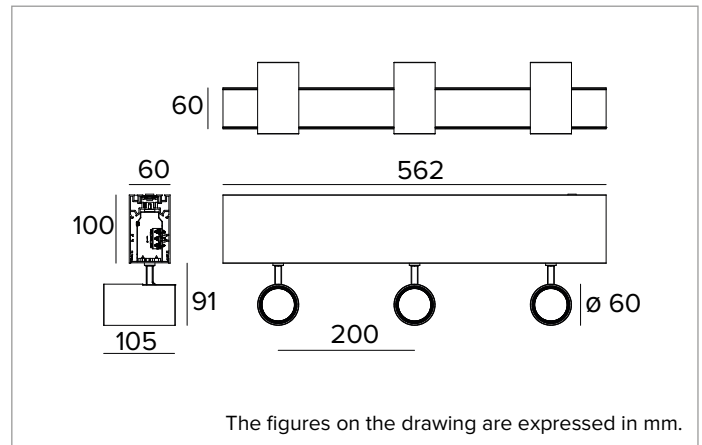

SOURCE

High efficiency Chip on Board LED Ra90.

Energy efficiency class: E

Nominal power: 3x14W

Nominal flux: 3x1964lm

Colour rendering index: 90

Rf: 90

Rg: 98

CCT nominal: 4000K

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Convex faceted highly reflective anodised aluminium precision optics with an opaque black silicone cut off ring.

Beam angles: MWFL

Optical efficiency: 77%

Fixture flux: 3x1504lm

Luminous efficacy: 99lm/W

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Painted extruded aluminium linear body. Projectors with a die-cast painted aluminium body. The optical unit can be adjusted from 0° a 90° on the vertical plane and 355° on the horizontal plane with the possibility to block the beam with a mechanical locking system on the horizontal plane and a friction locking system on the vertical plane.

Colour and finish: Deep black

Dimensions: L=562mm

Weight: 4.3Kg

Version: 3xLABEL 6

Degree of protection: IP20

ELECTRICAL CHARACTERISTICS

Integrated electronic ON-OFF power supply. Complete with electrical cables to guarantee feeding continuity (max 2kW for the ceiling version; max 0.6kW for the suspension version).

Fixture Power: 3x15W

Power supply: 220-240Vac 50/60Hz

Insulation Class: CLASS 1

Type of driver / Control: ON-OFF

Driver included: YES

Class F: YES

SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

Ambient temperature: 0°C / +25°C

INSTALLATION

For linear configurations complete with a special connector to attach to the power supply. For other configurations accessorise with special X, T and L connectors. To be completed with mounting systems and end caps.

NOTES

The arm is always supplied in the same colour as the body of the projector. 110-277Vac version available on request.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

1T7334EL | LOGICO System - Ceiling/Suspension - Projector module

Linear module with adjustable professional LED projectors for ceiling or suspension installation system

Related codes

End Caps



Colour	Code
--------	------

●	1T5938
---	---------------

End caps for Ceiling Mounted and Suspension.
2x

Suspension



L mm	Colour	Code
------	--------	------

2000	●	1T5900
------	---	---------------

4000	●	1T5903
------	---	---------------

Suspension cable.
To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version, 3 for the L/T version and 4 for the X version.
Suspension cable compatible with ceiling or wall installations, even inclined.

Mounting System



Colour	Code
--------	------

●	1T5913
---	---------------

Ceiling installation: polycarbonate bracket.
To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version, 3 for the L/T version and 4 for the X version.

Power Supply Kit



L mm	Driver	Colour	Code
------	--------	--------	------

4000	ON-OFF	●	1T5906EL
------	--------	---	-----------------

Suspension installation kit: power cable complete with a painted polycarbonate rosette.
Max 0.6kW.

Accessories

Electrical Connector



Code

1T5911

Linear electrical connector.
EL/DALI.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A.: FI-275656

TARGETTI