


1T7388 | LOGICO System - Ceiling/Suspension - Blind module

Blind module for ceiling or suspension system installation

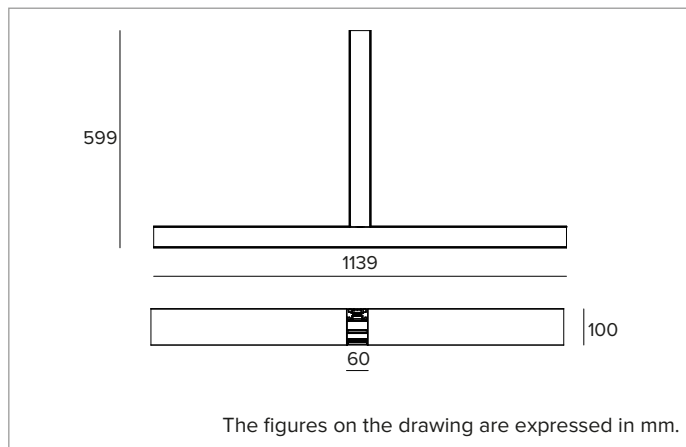

MECHANICAL CHARACTERISTICS

Painted extruded aluminium linear body.

Colour and finish: Plaster white

Dimensions: AxBxH=1139x599x100mm

Weight: 3.6Kg

Version: T CONNECTOR

Degree of protection: IP20

ELECTRICAL CHARACTERISTICS

Complete with electrical cables to guarantee feeding continuity (max 2kW for the ceiling version; max 0.6kW for the suspension version).

Power supply: 220-240Vac 50/60Hz

Insulation Class: CLASS 1

Class F: YES

INSTALLATION

For linear configurations complete with a special connector to attach to the power supply. For other configurations accessorise with special X, T and L connectors. To be completed with mounting systems and end caps.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. $t_q +25^{\circ}\text{C}$ (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A.: FI-275656

TARGETTI

1T7388 | LOGICO System - Ceiling/Suspension - Blind module

Blind module for ceiling or suspension system installation

Related codes

End Caps




| Colour | Code |
|--------|---------------|
| ○ | 1T5937 |

End caps for Ceiling Mounted and Suspension.

2x

Mounting System



| Colour | Code |
|--------|---------------|
| ○ | 1T5912 |

Ceiling installation: polycarbonate bracket.

To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version, 3 for the L/T version and 4 for the X version.

| Colour | Code |
|--------|---------------|
| ○ | 1T6919 |

Wall installation: painted metal bracket.

To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version.

Suspension



| L mm | Colour | Code |
|------|--------|---------------|
| 2000 | ○ | 1T5899 |
| 4000 | ○ | 1T5902 |


Suspension cable.

To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version, 3 for the L/T version and 4 for the X version.

Suspension cable compatible with ceiling or wall installations, even inclined.

Accessories

Electrical Connector



| Code |
|---------------|
| 1T5911 |

Linear electrical connector.

EL/DALI.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A.: FI-275656

TARGETTI