
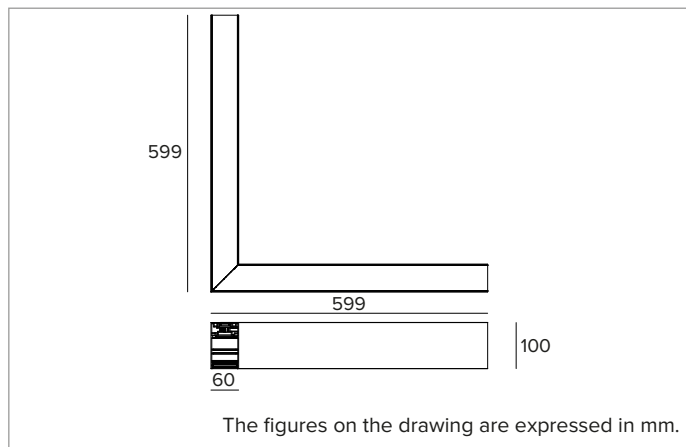


## 1T7392 | LOGICO System - Ceiling/Suspension - Blind module

### Blind module for ceiling or suspension system installation

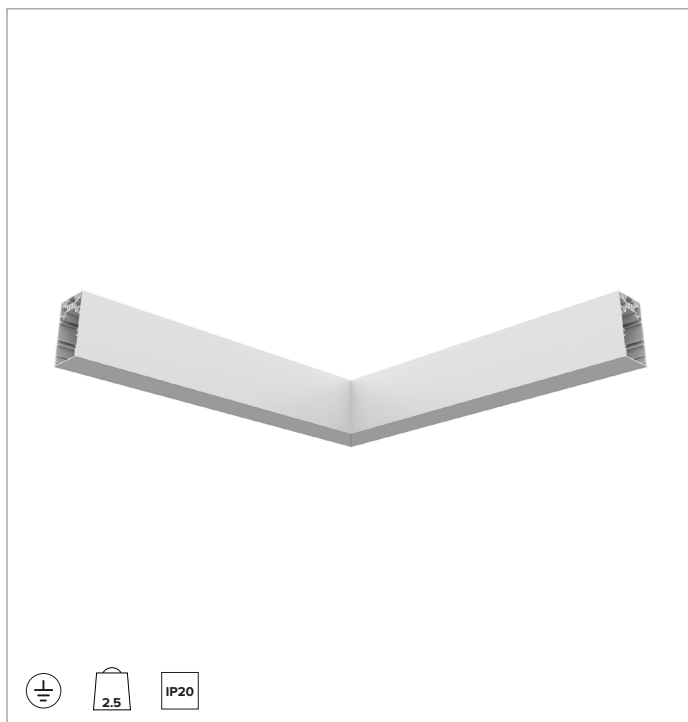

#### MECHANICAL CHARACTERISTICS

Painted extruded aluminium linear body.

**Colour and finish:** Deep black

**Dimensions:** AxBxH=599x599x100mm

**Weight:** 2.5Kg

**Version:** L CONNECTOR

**Degree of protection:** IP20

#### ELECTRICAL CHARACTERISTICS

Complete with electrical cables to guarantee feeding continuity (max 2kW for the ceiling version; max 0.6kW for the suspension version).

**Power supply:** 220-240Vac 50/60Hz

**Insulation Class:** CLASS 1

**Class F:** YES

#### INSTALLATION

For linear configurations complete with a special connector to attach to the power supply. For other configurations accessorise with special X, T and L connectors. To be completed with mounting systems and end caps.

#### WARRANTY

5 years.

#### WARNING

Luminaire designed for disposal/recycling at end-of-life.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**

# 1T7392 | LOGICO System - Ceiling/Suspension - Blind module

## Blind module for ceiling or suspension system installation

### Related codes

#### End Caps



Colour	Code
●	<b>1T5938</b>

End caps for Ceiling Mounted and Suspension.

2x


#### Mounting System



Colour	Code
●	<b>1T5913</b>

Ceiling installation: polycarbonate bracket.

To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version, 3 for the L/T version and 4 for the X version.



Colour	Code
●	<b>1T6920</b>

Wall installation: painted metal bracket.

To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version.

#### Suspension



L mm	Colour	Code
2000	●	<b>1T5900</b>
4000	●	<b>1T5903</b>

Suspension cable.

To be ordered in the following quantities for every fixture length: 1 for 281mm version, 2 for the 562 / 1122 / 1682mm version, 3 for the 3364mm version, 3 for the L/T version and 4 for the X version.

Suspension cable compatible with ceiling or wall installations, even inclined.

### Accessories

#### Electrical Connector



Code
<b>1T5911</b>

Linear electrical connector.

EL/DALI.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A.: FI-275656

**TARGETTI**