



1T7906EL | OZ Stand Alone - Ceiling Luminaire
LED ceiling fixtures



	2700K	H(m)	D(m)	Emax(lx)		
	Ra90		34°			
	Fixture Power	19W	1	0.61	5112	
	Source Flux	2454lm	2	1.22	1278	
	Fixture Flux	1752lm	3	1.83	568	
	Efficacy	91lm/W	4	2.43	319	
	TS1195	I _{max} =2083cd/klm	I _{max}	5112cd	5	3.04

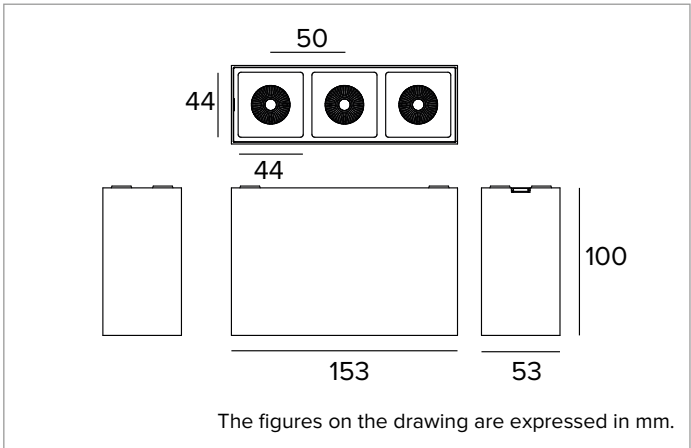

SOURCE

High efficiency Chip on Board LED Ra90.
Energy efficiency class: E
Nominal power: 17W
Nominal flux: 2454lm
Colour rendering index: 90
Rf: 92
Rg: 99
CCT nominal: 2700K
SDCM: 2
Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

FL optic. Anodised aluminium reflector and black polycarbonate frame.
The light is suitable for installation in work environments UGR<17 (EN12464-1).
Optic: REFLECTOR
Beam angles: FL
Optical efficiency: 71%
Fixture flux: 1752lm
Luminous efficacy: 91lm/W
Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Black painted die-cast aluminium body. 153x53mm version.
Colour and finish: Deep black
Dimensions: AxB=153x53mm
Weight: 0.7Kg
Version: 3X
Degree of protection: IP20

ELECTRICAL CHARACTERISTICS

Electronic ON-OFF driver integrated in the body of the fixture.
Fixture Power: 19W
Power supply: 220-240Vac 50/60Hz
Insulation Class: CLASS 1
Type of driver / Control: ON-OFF
Driver included: YES
Class F: YES
SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
Ambient temperature: 0°C / +25°C

INSTALLATION

Polycarbonate mounting system for ceiling installation.

NOTES

110-277Vac version available on request.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

