



1T9522EL | OMEGA

Stand alone linear LED fixture for wall installation

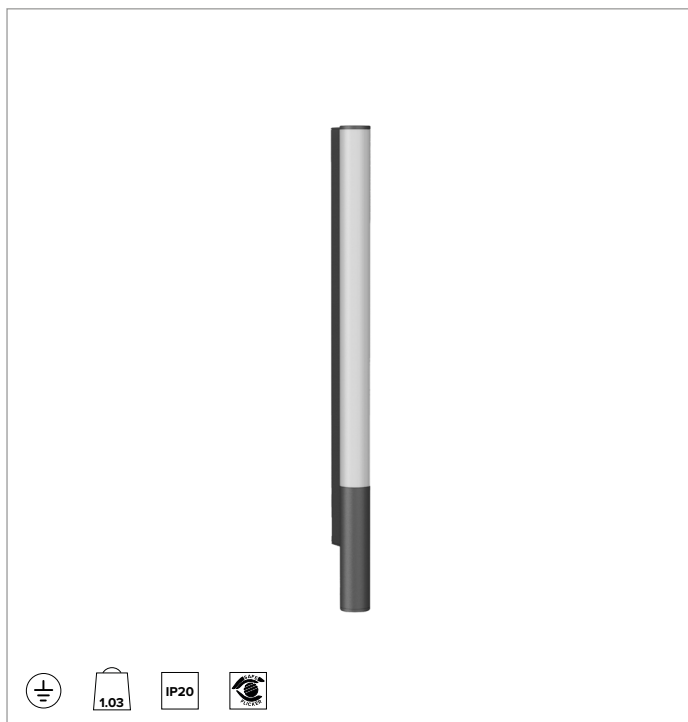

		4000K	H(m)	D(m)	E _{max} (lx)
		Ra90		126°	
Fixture Power	28W	1	3.90	368	
Source Flux	2928lm	2	7.80	92	
Fixture Flux	1649lm	3	11.70	41	
Efficacy	59lm/W	4	15.60	23	
TS1379	I _{max} =126cd/klm	I _{max}	368cd	5	19.50

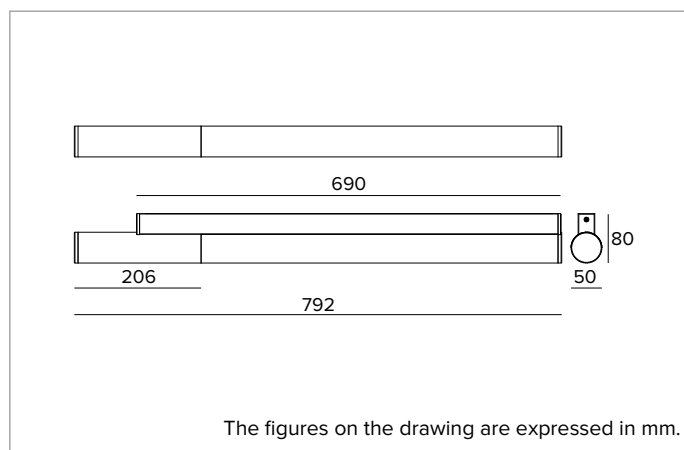

SOURCE

LED Engine made of linear LED boards Ra90.

Energy efficiency class: E

Nominal power: 23W

Nominal flux: 2928lm

Colour rendering index: 90

Rf: 89.8

Rg: 98.7

CCT nominal: 4000K

SDCM: 3

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Optical unit composed of an opal polycarbonate diffuser. Available in a direct emission version.

Emission: OPAL

Optical efficiency: 56%

Fixture flux: 1649lm

Luminous efficacy: 59lm/W

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Painted extruded aluminium body and painted aluminium optical unit and terminal. Opal polycarbonate screen.

Colour and finish: Ferrite

Dimensions: L=792mm

Weight: 1.03Kg

Version: WALL

Degree of protection: IP20

ELECTRICAL CHARACTERISTICS

Integrated electronic power supply. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power: 28W

Power supply: 220-240Vac 50/60Hz

Insulation Class: CLASS 1

Type of driver / Control: ON-OFF

Driver included: YES

Class F: YES

SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

Ambient temperature: 0°C / +25°C

INSTALLATION

Versions for wall installation L=792mm with installation kit supplied with the product.

NOTES

Designed in collaboration with Gensler. 110-277Vac version available on request.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI