


2T0068CA | OZ Lighting module - Multiple

Fixed multiple magnetic LED light modules, powered at low voltage



| | | 3000K | H(m) | D(m) | E _{max} (lx) |
|---------------|-------------------------------|------------------|--------|------|-----------------------|
| | | Ra90 | | 11° | |
| Fixture Power | 8W | 1 | 0.20 | 8314 | |
| Source Flux | 654lm | 2 | 0.40 | 2079 | |
| Fixture Flux | 510lm | 3 | 0.60 | 924 | |
| Efficacy | 61lm/W | 4 | 0.79 | 520 | |
| TS1838 | I _{max} =12713cd/klm | I _{max} | 8314cd | 5 | 0.99 |

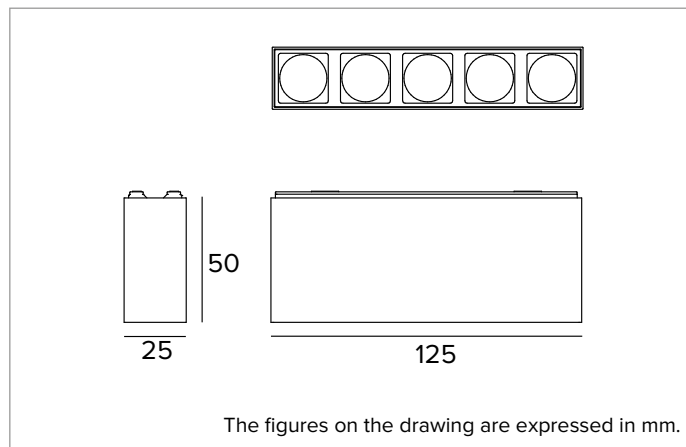

SOURCE

Hugh efficiency Ra90 LED Emitter.

Energy efficiency class: F

Nominal power: 7,3W

Nominal flux: 654lm

Colour rendering index: 90

Rf: 89.3

Rg: 104.3

CCT nominal: 3000K

SDCM: 2

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

The spot optic system has acrylic collimator lenses, an integrated holographic filter and a black polycarbonate frame. The light is suitable for installation in work environments UGR<19 (EN12464-1).

Optic: LENS

Beam angles: SP

Optical efficiency: 78%

Fixture flux: 510lm

Luminous efficacy: 61lm/W

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

White painted die-cast aluminium body. Multiple fixed light, 125x25mm.

Colour and finish: Plaster white

Dimensions: 25x125mm

Weight: 0.13Kg

Version: 5X CASAMBI

Degree of protection: IP20

ELECTRICAL CHARACTERISTICS

Fixture Power: 8W

Power supply: 48Vdc

Insulation Class: CLASS 3

Class F: YES

Ambient temperature: 0°C / +25°C

INSTALLATION

Extremely rapid, versatile and simple mechanical and electrical coupling system using magnets which support the fixture on the Power Track and feed power inside the fixture on all versions.

NOTES

Integrated Casambi control system (Casambi Ready). DALI control system available using a special accessory. 110-277Vac version available on request.

WARRANTY

5 years.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A.: FI-275656

TARGETTI