



E024ALL940BC | CATIRPEL

Modular low voltage outdoor system. Thanks to its flexibility, it can be installed in contexts of curved and irregular surfaces



	4000K	H(m)	D1(m)	D2(m)	E _{max} (lx)		
	Ra90		19°	33°			
	Fixture Power	6W	1	0.34	0.59	709	
	Source Flux	616lm	2	0.68	1.18	177	
	Fixture Flux	214lm	3	1.02	1.77	79	
Efficacy	39lm/W	4	1.36	2.36	44		
TS1951	I _{max} =1151cd/klm	I _{max}	709cd	5	1.71	2.95	28

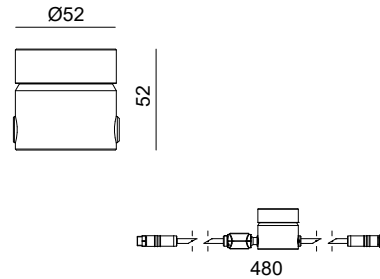

The figures on the drawing are expressed in mm.

SOURCE

High efficiency Chip on Board LED Ra90 available in four colour temperatures.

Energy efficiency class: F

Nominal power: 1X4,7W

Nominal flux: 616lm

Colour rendering index: 90

Rf: 90

Rg: 98

CCT nominal: 4000K

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Louvre - Elliptical version: optic composed of an optical grade PMMA lens, a holographic diffusing filter and a black painted aluminium anti-glare grid with a honeycomb structure. Optical accessories available to control the light beam.

Optic: LENS

Beam angles: ELL

Optical efficiency: 35%

Fixture flux: 214lm

Luminous efficacy: 39lm/W

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

It's made of adjustable projectors that can be oriented in multiple directions in space, thanks to a mechanical connection made through spherical joints. Cylindrical aluminium bodies obtained through CNC machining process and protected with a layer of black anodization with a minimum thickness of 15µ. Joint body in die-cast aluminum with cathodoresis treatment. Powder coated in a burnished copper colour. Tempered extra clear front glass. Flexibility of the optical bodies by ±110° on the vertical plane and mechanical locking. Flexibility of the chain with respect to the contact surface of ±45°. Minimum achievable curvature radius of 95mm with an angle of 45° between projectors. IP67 in-out connectors (in Nylon).

Colour and finish: Burnished copper

Dimensions: L=480mm

Weight: 0.26Kg

Version: 1X IN-OUT - LOUVRE

Degree of protection: IP66, IP67

Mechanical Resistance: IK06

ELECTRICAL CHARACTERISTICS

To be completed with remote driver. Connection cables and 3-way connector available as accessories. Complete with through wiring. Refer to installation manual for the maximum system distances.

Fixture Power: 6W

Power supply: 24Vdc

Insulation Class: CLASS 3

Class F: YES

SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

Ambient temperature: -25°C / +35°C

INSTALLATION

Designed for connection in series through external cable (0.15m + 0.15m) completed with male/female miniaturised IP67 connectors. Accessories available for multiple installation modes.

NOTES

The photometrics refer to individual projectors. Values related to the power consumption of the fixture do not take into account the consumption of the accessory driver, which depends on the choice of driver.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Non-replaceable control gear.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

E024ALL940BC | CATIRPEL

Modular low voltage outdoor system. Thanks to its flexibility, it can be installed in contexts of curved and irregular surfaces

Related codes**Power Supply**

	Colour	Code
		A015BC

24Vdc driver box (IP67).

L=250mm 80W.

Provided with IP67 male/female connectors for 220-240V and IP67 miniaturized female connector for 24V.

Dimensions LxHxP mm	Power	Power supply	Output voltage	IP	Code
230x87x43	100W	220-240Vac	24Vdc	IP67	1T3587
238x42x67	200W	220-240Vac	24Vdc	IP67	1T3588

Electronic ON-OFF power supply.

Accessories**Screen**

	Colour	Code
		A031BC

Cylindrical screen.

Aluminium with black anodizing treatment.

A031BC - Powder coated in a burnished copper colour.

	Colour	Code
		A017BC

Asymmetric screen.

Aluminium with black anodizing treatment.

A017BC - Powder coated in a burnished copper colour.**Grid**

	Colour	Code
		A032BC

Anti-glare louver.

The central elements can be adjusted +/- 360° for a perfect glare control.

Aluminium with black anodizing treatment.

A032BC - Powder coated in a burnished copper colour.**Holder Ring**

	Colour	Code
		A033BC

Holder ring.

Aluminium with black anodizing treatment.

A033BC - Powder coated in a burnished copper colour.**Filter**

	Code
	A034

Blade of light filter.

To be used with holder ring A033.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

E024ALL940BC | CATIRPEL

Modular low voltage outdoor system. Thanks to its flexibility, it can be installed in contexts of curved and irregular surfaces

Bracket

Colour	Code
--------	------

	A019BC
---	---------------

Bracket for installation on surfaces.
Powder coated stainless steel.



Colour	Code
--------	------

	A020BC
---	---------------

Bracket for installation on trees.
To be completed with accessory strap A023.
Powder coated stainless steel.

Mounting System

L mm	Code
------	------

2000	A023
------	-------------

Strap for tree bracket (tree installation).



L mm	H mm	P mm	Colour	Code
------	------	------	--------	------

25	162	25		A021BC
----	-----	----	---	---------------

Earthspike.
Powder coated stainless steel.



H mm	Colour	Code
------	--------	------

20		A022BC
----	---	---------------

Cylindrical spacer.
Aluminium with black anodizing treatment.
A022BC - Powder coated in a burnished copper colour.



H mm	Colour	Code
------	--------	------

20		A055BC
----	---	---------------

Cylindrical spacer for cable installation (not supplied).
Aluminium with black anodizing treatment.
A055BC - Powder coated in a burnished copper colour.

Cable

L mm	Code
------	------

1000	A026
------	-------------

2000	A027
------	-------------

3000	A028
------	-------------

6000	A078
------	-------------

Connection cable.

End Caps

Code

A029

End cap for miniaturized female connector.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value, tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

E024ALL940BC | CATIRPEL**Modular low voltage outdoor system. Thanks to its flexibility, it can be installed in contexts of curved and irregular surfaces****Cable**

Code

A030

Connection kit for remote driver.

Connector

Code

A024

3 ways connector (1IN-2OUT).

Control systems

Code

1T6581

Dimmer for 12-24Vdc constant voltage LED driver.
1-10V/DALI control input.
IP20

Code

1E3048

IP67 wireless control unit with DALI interface.
It generates a local DALI2 bus, enabling a direct connection to a DALI interface LED driver.
The module can only be used in a closed system and cannot be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology.
The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures. The control unit is preset to the DALI 1CH profile, meaning the device can control a single DALI driver with broadcast commands.
In addition to the DALI broadcast, other operating modes are available, such as:

- Button (normally open)
- Control unit 0/1-10V
- Control unit DALI Tunable White DT8
- Presence sensor



Code

1E4369

IP67 Extender for wireless control of LED driver with dimming DALI interface based on Casambi technology.

It has a DALI2 output with the capacity to control up to 40 lighting fixtures.

With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.

IP67 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.

In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI