


## E025MFL840ACB | Keplero Quantum 130

### Recessed professional projector with a fixed optical unit



|  | 4000K                        | H(m)             | D(m)   | E <sub>max</sub> (lx) |      |     |
|-----------------------------------------------------------------------------------|------------------------------|------------------|--------|-----------------------|------|-----|
|                                                                                   | Ra80                         |                  | 24°    |                       |      |     |
|                                                                                   | Fixture Power                | 13W              | 1      | 0.43                  | 6070 |     |
|                                                                                   | Source Flux                  | 2053lm           | 2      | 0.86                  | 1518 |     |
|                                                                                   | Fixture Flux                 | 1330lm           | 3      | 1.29                  | 674  |     |
|                                                                                   | Efficacy                     | 101lm/W          | 4      | 1.73                  | 379  |     |
| TS2035                                                                            | I <sub>max</sub> =2957cd/klm | I <sub>max</sub> | 6070cd | 5                     | 2.16 | 243 |

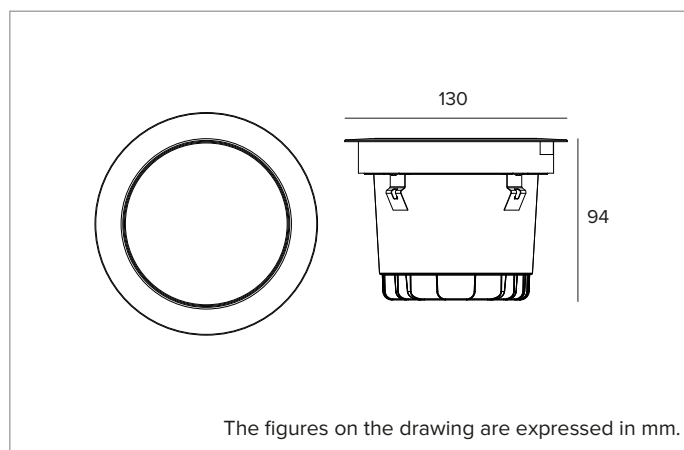

The figures on the drawing are expressed in mm.

#### SOURCE

High efficiency Chip on Board LED. 4000K (Ra80) colour temperature.

**Energy efficiency class:** B

**Nominal power:** 12W

**Nominal flux:** 2053lm

**Colour rendering index:** 80

**Rf:** 81

**Rg:** 97

**CCT nominal:** 4000K

#### ILLUMINOTECHNICAL CHARACTERISTICS

Optical grade PMMA lens and holographic diffusing filter.

**Optic:** LENS

**Beam angles:** FL

**Optical efficiency:** 65%

**Fixture flux:** 1330lm

**Luminous efficacy:** 101lm/W

**Photobiological safety:** Compliant with RG1 low risk group

#### MECHANICAL CHARACTERISTICS

Die-cast aluminium body with 2 layers of protection: cataphoresis and black paint. Ultra flat decorative ring with a flared edge, made of brushed stainless steel (AISI 316) in a copper bronze finish. Anti-slip glass for public pedestrian areas.

**Colour and finish:** Copper bronze

**Version:** ANTI-SLIP GLASS

**Degree of protection:** IP66,IP67,IP68

**Mechanical Resistance:** IK10

#### ELECTRICAL CHARACTERISTICS

24Vdc power supply. ON-OFF or DALI2 remote driver to be ordered separately. Precabled with 1,5m 2x0,5mm<sup>2</sup> cable. Casambi control system available via accessory (for products with DALI2 driver only).

**Fixture Power:** 13W

**Power supply:** 24Vdc

**Insulation Class:** CLASS 3

**Driver included:** NO

**Class F:** YES

**Ambient temperature:** -25°C / +35°C

#### INSTALLATION

In-ground installation by a reinforced nylon sleeve, to be ordered separately. Sleeves are available for flush or trim installation. 20kN resistance to static load. Wall/ceiling installation by the accessory mounting systems.

#### NOTES

IP68: the fixture is not suitable for permanent underwater installation but can withstand temporary accidental immersion to a depth of 1.5 metres (max.1h). All the Keplero Quantum 130 versions meet the drive-over and walk-over requirements set out in the EN 60598-2-13 standard. It features the "Waterblock Smart" technical solution which involves resin-sealing the connection cables to minimize the risk of moisture rising into the fixture. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

#### WARRANTY

5 years.

#### WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Non-replaceable control gear.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.*

*Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

*We reserve the right to make technical changes.*

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**

## E025MFL840ACB | Keplero Quantum 130

### Recessed professional projector with a fixed optical unit

## Related codes

### Sleeve



| L mm | H mm | P mm | Code        |
|------|------|------|-------------|
| 317  | 125  | 317  | <b>A121</b> |

Reinforced nylon installation sleeve.

The sleeve is designed for the trim installation of the fixture.

Complete with a cover element to protect the recessed housing during concrete pouring.

AxB 317x317 H. 125



| L mm | H mm | P mm | Colour                                                                              | Code          |
|------|------|------|-------------------------------------------------------------------------------------|---------------|
| 317  | 127  | 317  |  | <b>A122CB</b> |

Reinforced nylon installation sleeve.

The sleeve is designed for the flush installation of the fixture.

Complete with a cover element to protect the recessed housing during concrete pouring.

AxB 317x317 H. 127

### Mounting System



| Code        |
|-------------|
| <b>A123</b> |

Steel spring kit for wall and ceiling installations.

### Power Supply

| Dimensions<br>LxHxP mm | Power    | Power supply | Output<br>voltage | IP   | Code          |
|------------------------|----------|--------------|-------------------|------|---------------|
| 171x37x62              | 60W MAX  | 220-240Vac   | 24Vdc             | IP67 | <b>A134EL</b> |
| 228x39x68              | 150W MAX | 220-240Vac   | 24Vdc             | IP67 | <b>A137EL</b> |

Electronic ON-OFF power supply.

| Dimensions<br>LxHxP mm | Power    | Power supply | Output<br>voltage | IP   | Code          |
|------------------------|----------|--------------|-------------------|------|---------------|
| 150x35x53              | 60W MAX  | 220-240Vac   | 24Vdc             | IP67 | <b>A134D2</b> |
| 191x38x63              | 120W MAX | 220-240Vac   | 24Vdc             | IP67 | <b>A136D2</b> |

DALI2 power supply.

## Accessories

### Connector



| Code          |
|---------------|
| <b>1E2493</b> |

Linear connection box IP68.

4 poles max. wire section 2.5mm<sup>2</sup>.

Cable diameter range from 7 to 12mm.



| Code          |
|---------------|
| <b>1E2494</b> |

Multiple connection box IP68.

1 IN - 3 OUT 4 poles max. wire section 2.5mm<sup>2</sup>.

Cable diameter range from 6 to 12mm.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

**TARGETTI**

## E025MFL840ACB | Keplero Quantum 130

### Recessed professional projector with a fixed optical unit

#### Tool



Code

**1E3305**

Tightening wrench for the connector kit.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
Via Pratese, 164  
50145 Firenze - Italy  
Tel: +39 055 37911  
targetti.com  
targetti@targetti.com

CCIAA Firenze  
Share Capital:  
€ 500.000,00  
VAT N. (IT):  
01537660480  
R.E.A: FI-275656

# TARGETTI