



T010BV930D2PW | LOGICO EASY System 57 - OPAL / UGR19 LED luminaire for ceiling or suspended system installation. L module



The fixture's photometric values
can be found on the following pages

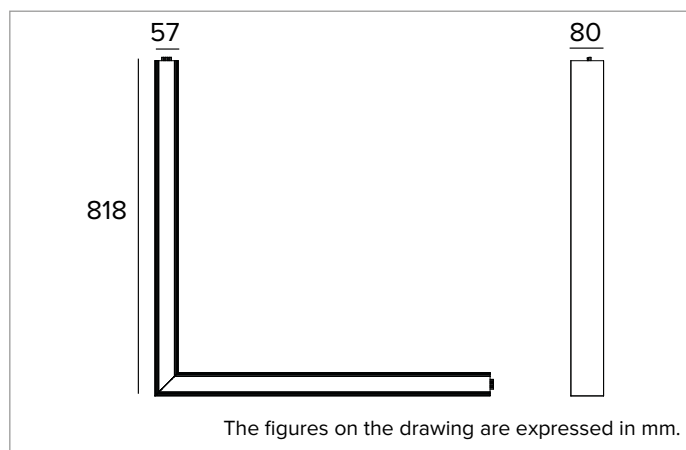

SOURCE

LED Engine made of linear LED boards Ra90.

Energy efficiency class: E

Nominal power: 2x21W

Nominal flux: See photometries

Colour rendering index: 90

Rf: 92

Rg: 101

CCT nominal: 3000K

Lifetime (L80/B10): 100000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Direct/indirect emission in two effect variants: diffused light - OPAL optics - and controlled light - UGR19 optics. Diffused light - OPAL optic: optical system made of a steel reflector with white polymer coating and a closing diffuser screen in opal anti-glare polycarbonate supplied in unrollable reels and available as a related code. Controlled light - UGR19 optic: optical system made of a steel reflector with white polymer coating and UGR closing diffuser screen supplied in unrollable reels and available as a related code (UGR<19 and L65<3000 cd/m² EN-12464-1).

Emission: DIRECT/INDIRECT

Optic: REFLECTOR

Optical efficiency: 100%

Fixture flux: See photometries

Luminous efficacy: See photometries

Photobiological safety: Compliant with RG0 exempt risk group

MECHANICAL CHARACTERISTICS

Painted extruded aluminium body with 57mm section. Upper closing screen in translucent polycarbonate.

Colour and finish: White

Dimensions: AxB=818x818mm

Weight: 3.55Kg

Version: L CONNECTOR

Degree of protection: IP40

Mechanical Resistance: IK02

ELECTRICAL CHARACTERISTICS

Integrated electronic DALI2 driver. "Easy Connection" system for a quick connection between the modules of the system thanks to the pre-assembled plug/socket connection elements. Preset for through wiring allowing to reach a maximum length of 18 meters. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power: 2x24W

Power supply: 220-240Vac 50/60Hz

Insulation Class: CLASS 1

Type of driver / Control: DALI2 - PUSH

Driver included: YES

Class F: YES

SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

Ambient temperature: 0°C / +25°C

Relative humidity UR: <85%

INSTALLATION

To be completed with polycarbonate end caps, mounting systems for surface or suspended application and terminal block for connection to the power line.

NOTES

Casambi control system available using a dedicated accessory. Consult factory to verify the quantity of DALI drivers installed. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

REGULATIONS AND CERTIFICATIONS

CE.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).


We reserve the right to make technical changes.


Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

T010BV930D2PW | LOGICO EASY System 57 - OPAL / UGR19
LED luminaire for ceiling or suspended system installation. L module

| | | | | | | |
|--|-----------------------------|------------------|-------|----------|-------|----|
|  | 3000K | H(m) | D(m) | Emax(lx) | | |
| | Ra90 | | 111° | | | |
| | Fixture Power | 24W | 1 | 2.90 | 247 | |
| | Source Flux | 1840lm | 2 | 5.80 | 62 | |
| | Fixture Flux | 1840lm | 3 | 8.70 | 27 | |
| | Efficacy | 78lm/W | 4 | 11.60 | 15 | |
| G0300A | I _{max} =222cd/klm | I _{max} | 409cd | 5 | 14.49 | 10 |

| | | | | | | | |
|--|-----------------------------|------------------|-------|-------|----------|------|----|
|  | 3000K | H(m) | D1(m) | D2(m) | Emax(lx) | | |
| | Ra90 | | 83° | 89° | | | |
| | Fixture Power | 24W | 1 | 1.78 | 1.97 | 374 | |
| | Source Flux | 1830lm | 2 | 3.56 | 3.94 | 93 | |
| | Fixture Flux | 1830lm | 3 | 5.33 | 5.91 | 42 | |
| | Efficacy | 78lm/W | 4 | 7.11 | 7.88 | 23 | |
| G0300 | I _{max} =226cd/klm | I _{max} | 413cd | 5 | 8.89 | 9.85 | 15 |

OP

Nominal flux 2x3680lm
 Fixture flux 2x1840lm
 Luminous efficacy 157lm/W

UGR

Nominal flux 2x3660lm
 Fixture flux 2x1830lm
 Luminous efficacy 156lm/W

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
 Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

Targetti Sankey S.r.l.
 Via Pratese, 164
 50145 Firenze - Italy
 Tel: +39 055 37911
 targetti.com
 targetti@targetti.com

CCIAA Firenze
 Share Capital:
 € 500.000,00
 VAT N. (IT):
 01537660480
 R.E.A.: FI-275656



We reserve the right to make technical changes.

T010BV930D2PW | LOGICO EASY System 57 - OPAL / UGR19
LED luminaire for ceiling or suspended system installation. L module

Related codes

Screen



| Dimensions | Code |
|------------|----------------|
| L=6m | A001ML1 |
| L=9m | A001ML2 |
| L=15m | A001ML3 |

UGR19 screen (Direct Emission).
For LOGICO EASY System 57 - UGR19.



| Dimensions | Code |
|------------|----------------|
| L=6m | A002ML1 |
| L=9m | A002ML2 |
| L=15m | A002ML3 |

OPAL screen (Direct Emission).
For LOGICO EASY System 57 - OPAL.

Accessories

Electrical Connector



| Driver | Colour | Code |
|--------|-----------------------|-----------------|
| DALI2 | <input type="radio"/> | A014MD2W |

L-shaped blind joint.
Sizes 818x818x80mm.
For LOGICO EASY System 57.

End Caps



| Colour | Code |
|-----------------------|----------------|
| <input type="radio"/> | A003M2W |

End caps (2 pieces).
For LOGICO EASY System 57 - OPAL / UGR19.

Canopy



| Colour | Code |
|-----------------------|--------------|
| <input type="radio"/> | A004W |

Canopy with 5 poles terminal block.
Feeding cable not included.

Cover Panel



| Colour | Code |
|-----------------------|---------------|
| <input type="radio"/> | A005MW |

Joint for screens.
To be used for configurations longer than 15 meters.
For LOGICO EASY System 57.

Bracket



| Code |
|--------------|
| A007M |

Bracket with adjustment system for suspended installation (2 pieces).
Two brackets needed for each lighting module.
For LOGICO EASY 57.

Suspension



| Version | Code |
|---------|--------------|
| L=6m | A008T |
| L=5m | A008U |
| L=4m | A008V |
| L=3m | A008W |
| L=2m | A008X |
| L=1m | A008Y |
| L=0,5m | A008Z |

Suspension cable (2 pieces).

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656



T010BV930D2PW | LOGICO EASY System 57 - OPAL / UGR19 LED luminaire for ceiling or suspended system installation. L module

Terminal Box



| Version | Code |
|-------------|--------------|
| 5 Poli DALI | A009X |

Terminal block (plug/socket).
One for each power supply.
A009X - For LOGICO EASY 57 | 100.

Control systems



Code

1T5349

IP20 wireless control unit with DALI interface.
It generates a local DALI2 bus, enabling a direct connection to a DALI interface LED driver.
The module can only be used in a closed system and cannot be connected to an existing DALI network.
The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology.
The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures.
The control unit is preset to the DALI 1CH profile, meaning the device can control a single DALI driver with broadcast commands.
In addition to the DALI broadcast, other operating modes are available, such as:

- Button (normally open)
- Control unit 0/1-10V
- Control unit DALI Tunable White DT8
- Presence sensor



Code

2T0131

IP20 Extender for wireless control of LED driver with dimming DALI (or 1-10V) interface based on Casambi technology.
It has a DALI2 output with the capacity to control up to 40 lighting fixtures.
With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.
IP20 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.
In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER 0/1-10V
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI