T033MWR940ELPW | RAY 115
Professional adjustable LED projector

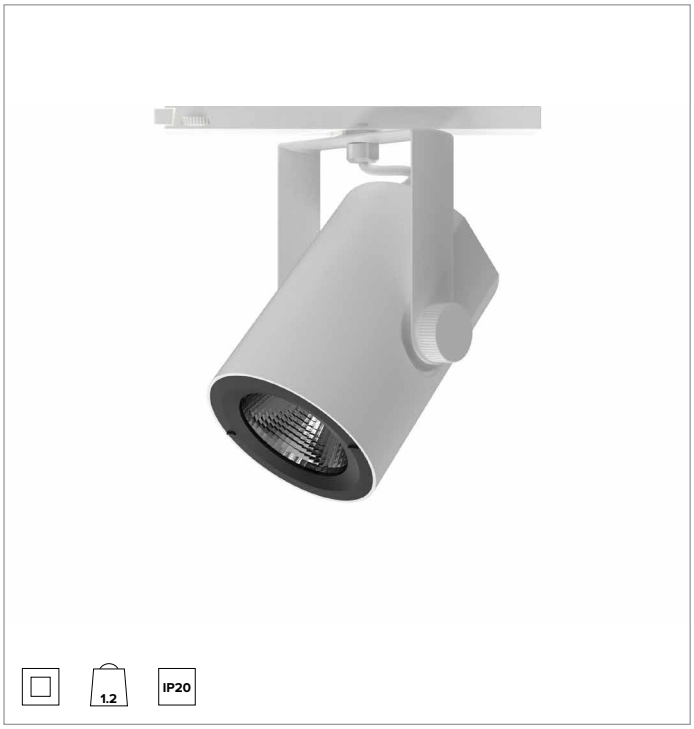



TS834 Imax=1528cd/klm

4000K		H(m)	D(m)	Emax(lx)
Ra90			45°	
Fixture Power	57W	1	0.84	10095
Source Flux	6640lm	2	1.67	2524
Fixture Flux	5770lm	3	2.51	1122
Efficacy	101lm/W	4	3.35	631
Imax	10146cd	5	4.18	404

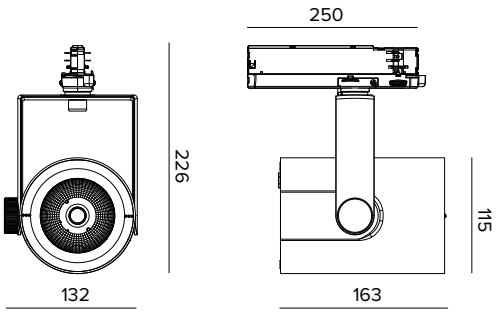

The figures on the drawing are expressed in mm.

SOURCE

High efficiency Chip on Board LED Ra90. Ra97 on request.
Energy efficiency class: E
Nominal power: 50W
Nominal flux: 6640lm
Colour rendering index: 90
Rf: 90
Rg: 98
CCT nominal: 4000K
Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Reflector with ellipsoidal facets in reflective anodised aluminium. Interchangeable reflectors available as accessories.
Optic: REFLECTOR
Beam angles: MWFL
Optical efficiency: 87%
Fixture flux: 5770lm
Luminous efficacy: 101lm/W
Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Painted die-cast aluminium body. Black painted polycarbonate front ring. Adjustable from 0° to -90° on the vertical plane and 359° on the horizontal plane. Mechanical beam locking system on the vertical plane and friction beam locking system on the horizontal plane. The centre of gravity always remains in axis with the track regardless of the aiming.
Colour and finish: Plaster white
Dimensions: 115
Weight: 1.2Kg
Degree of protection: IP20

ELECTRICAL CHARACTERISTICS

ON-OFF electronic driver integrated into the track adapter.
Fixture Power: 57W
Power supply: 220-240Vac 50/60Hz
Insulation Class: CLASS 2
Type of driver / Control: ON-OFF
Driver included: YES
Class F: YES
Ambient temperature: 0°C / +25°C

INSTALLATION

Electrified track mounting. Optical accessories that can be installed with a support ring are available.

WARRANTY

5 years.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

T033MWR940ELPW | RAY 115
Professional adjustable LED projector

Accessories

Cut-off

	Ø mm	Code
	80	**1T3142**

Cut-off Tube.
Allows for the beam to be focused while removing the fall-off component.

Ray Shade

	Ø mm	Code
	118	**A025**

Adjustable barn doors flaps made of black painted steel.

Optic

	Ø mm	Optic	Code
	80	SP 14°	**A057SPR**
	80	FL 25°	**A057MFR**
	80	MWFL 45°	**A057MWR**

Interchangeable anodised reflective aluminium reflectors.
Available in Spot, Flood and Medium Wide Flood beams.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656