


1E2654 | JEDI Projector

Adjustable linear LED projector



	4000K	H(m)	D(m)	Emax(lx)		
	Ra80		10°			
	Fixture Power	28W	1	0.18	34880	
	Source Flux	2109lm	2	0.37	8720	
	Fixture Flux	1690lm	3	0.55	3876	
	Efficacy	60lm/W	4	0.73	2180	
TS889	Imax=16539cd/klm	Imax	34880cd	5	0.92	1395

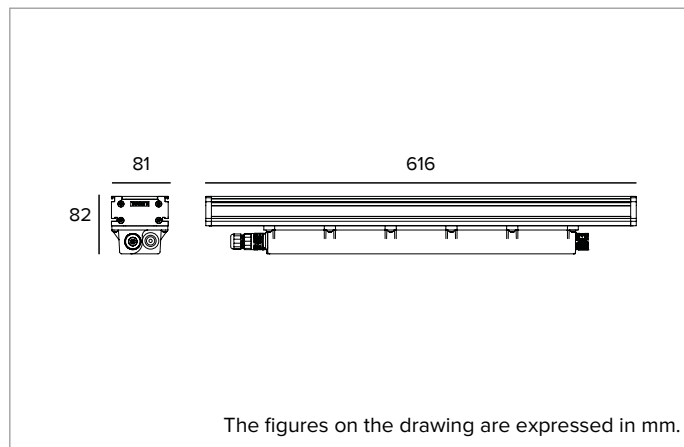

SOURCE

High efficiency Ra80 LED Emitter. 2700K-3500K on request.

Energy efficiency class: F

Nominal power: 23W

Nominal flux: 2109lm

Colour rendering index: 80

Rf: 80.8

Rg: 98.8

CCT nominal: 4000K

SDCM: 2

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Acrylic lenses with an integrated holographic filter.

Optic: LENS

Beam angles: SP

Optical efficiency: 80%

Fixture flux: 1690lm

Luminous efficacy: 60lm/W

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Extruded anodised aluminium 15µ body. Extra clear 4mm thick glass flat screen. Black polycarbonate driver box. The body of the fixture is adjustable and can be installed away from the mounting surface by sliding the brackets along a special guide.

Colour and finish: Aluminium

Dimensions: L=616mm

Weight: 2.6Kg

Degree of protection: IP66,IP67

Mechanical Resistance: IK08

ELECTRICAL CHARACTERISTICS

Integrated electronic power supply. Complete with IP68 connector for power supply. To be completed with a watertight IP68 (IN-OUT) connector kit with a quick installation system (1E2769) or with a connection cable complete with 5 pin connector (1E2762, 1E2763, 1E2764, 1E2765) for in-line installations. Fixture with "internal" wire feedthrough. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power: 28W

Power supply: 220-240Vac 50/60Hz

Insulation Class: CLASS 1

Type of driver / Control: ON-OFF

Driver included: YES

Class F: YES

SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

Ambient temperature: -25°C / +40°C

INSTALLATION

To be completed with stainless steel fixed or adjustable brackets. The brackets can slide along the body of the fixture to be positioned according to installation needs.

NOTES

Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. 110-277Vac version available on request.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

1E2654 | JEDI Projector

Adjustable linear LED projector

Related codes

Mounting System

Code
1E2752

Short bracket for wall installation (2 pieces).

Code
1E2753

Long bracket for wall installation (2 pieces).



Code
1E2754

Bracket for ceiling installation (2 pieces).

Accessories

End Caps



Code
1E2761

End cap with bracket for ceiling installation included.

Cover Panel

L mm	Code
616	1E3045

Side cover for ceiling installation.

L mm	Code
616	1E2755

Side cover for wall/cornice installation.

L mm	Code
616	1E2758

Anti-glare side cover.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656



1E2654 | JEDI Projector

Adjustable linear LED projector

Cable



L mm	Code
320	1E2762
470	1E2763
620	1E2764
770	1E2765

Connection cable.

Complete with 5 pole connectors.

For the ON-OFF and DALI version.

1E2762 - For in line adjacent connection of one 600mm projector with one 900mm projector.

1E2763 - For in line adjacent connection of one 600mm projector with one 1200mm projector or two 900mm projectors.

1E2764 - For in line adjacent connection of one 900mm projector with one 1200mm projector.

1E2765 - For in line adjacent connection of two 1200mm projectors.

Connector



Code
1E2769

Linear connection box IP66/IP68.

5 poles max. wire section 1.5mm².

Cable diameter range from 7 to 12mm.

Surge protector



Code

A013A

Surge protector compatible with CLASS I lighting fixtures.

Operating voltage 230-277Vac.

SPD type 2+3.

Max surge protection 10kV.

CLASS I

IP67

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A.: FI-275656

TARGETTI