


1E4244 | JEDI Recessed RGBW

Powerful recessed linear RGBW LED projector



The fixture's photometric values can be found on the following pages

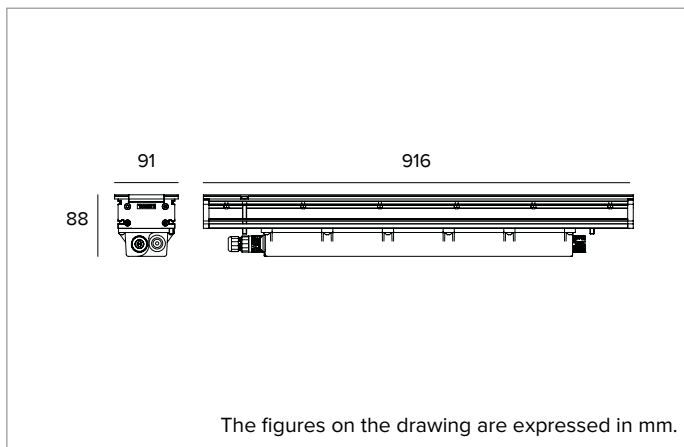

SOURCE

LED Multichip RGBW module with white 3000K.

Energy efficiency class: G

Nominal power: 33W

Nominal flux: See photometries

CCT nominal: See photometries

SDCM: 2

ILLUMINOTECHNICAL CHARACTERISTICS

Internal optical system composed of a primary cylindrical glass lens, a high reflectance anodised aluminium reflector and an integrated holographic filter.

Optic: HYBRID

Beam angles: GRZ

Optical efficiency: 79%

Fixture flux: See photometries

Luminous efficacy: See photometries

Photobiological safety: Compliant with RG1 low risk group

MECHANICAL CHARACTERISTICS

Extruded anodised aluminium 15µ body. Extra clear 10mm thick glass flat screen. Brushed stainless steel (AISI 316) frame. The body of the fixture can resist a static load up to 20kN and vandalism (IK10). Anti-slip glass available on request.

Colour and finish: Aluminium

Dimensions: L=916mm

Weight: 4.5Kg

Degree of protection: IP66,IP67,IP68,IP69

Mechanical Resistance: IK10

ELECTRICAL CHARACTERISTICS

Integrated electronic power supply. Controlled using DMX-RDM protocols that allow to programme the fixture remotely (no dip-switch) using the DMX data line. Pass-through power supply with 1 meter cable and 3-pole IP68 connectors. Pass-through DMX line connection with 5-pole IP68 panel connectors. Programming the fixtures is done using the USB-RDM programmer that is available as an accessory.

Fixture Power: See photometries

Power supply: 220-240Vac 50/60Hz

Insulation Class: CLASS 1

Type of driver / Control: DMX RDM

Driver included: YES

Class F: YES

SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

Ambient temperature: -25°C / +35°C

INSTALLATION

To be completed with an aluminium insertion box suitable for in-line installation.

NOTES

LMS Casambi wireless control available on request. Photometries show the maximum emission values of fixtures. Uses the "Waterblock Smart" technical solution that involves resin coating the connection cables, limiting the risk of humidity reaching the driver or the fixture. 110-277Vac version available on request. IP68: the projector is not suitable for permanent underwater installation but can withstand temporary accidental immersion to a depth of 2 metres (max.24h). IP69: IEC/EN 60529 standard compliant.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.


Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

1E4244 | JEDI Recessed RGBW

Powerful recessed linear RGBW LED projector

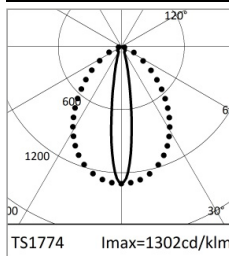

		H(m)	D1(m)	D2(m)	E _{max} (lx)		
		-	17°	80°			
Fixture Power	41W	1	0.30	1.67	3504		
Source Flux	2691lm	2	0.59	3.34	876		
Fixture Flux	2129lm	3	0.89	5.01	389		
Efficacy	52lm/W	4	1.18	6.69	219		
TS1774	I _{max} =1302cd/klm	I _{max}	3504cd	5	1.48	8.36	140



		H(m)	D1(m)	D2(m)	E _{max} (lx)		
		-	17°	80°			
Fixture Power	30W	1	0.30	1.67	1996		
Source Flux	1533lm	2	0.59	3.34	499		
Fixture Flux	1213lm	3	0.89	5.01	222		
Efficacy	41lm/W	4	1.18	6.69	125		
TS1774	I _{max} =1302cd/klm	I _{max}	1996cd	5	1.48	8.36	80

RGBW


Fixture Power	41W
Nominal flux	2691lm
Fixture flux	2129lm
Luminous efficacy	52lm/W

RGB

Fixture Power	30W
Nominal flux	1533lm
Fixture flux	1213lm
Luminous efficacy	41lm/W



	3000K	H(m)	D1(m)	D2(m)	E _{max} (lx)		
		-	17°	80°			
Fixture Power	11W	1	0.30	1.67	1707		
Source Flux	1311lm	2	0.59	3.34	427		
Fixture Flux	1037lm	3	0.89	5.01	190		
Efficacy	97lm/W	4	1.18	6.69	107		
TS1774	I _{max} =1302cd/klm	I _{max}	1707cd	5	1.48	8.36	68

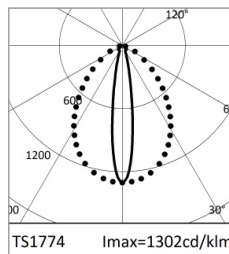


		H(m)	D1(m)	D2(m)	E _{max} (lx)		
		-	17°	80°			
Fixture Power	8W	1	0.30	1.67	613		
Source Flux	471lm	2	0.59	3.34	153		
Fixture Flux	373lm	3	0.89	5.01	68		
Efficacy	47lm/W	4	1.18	6.69	38		
TS1774	I _{max} =1302cd/klm	I _{max}	613cd	5	1.48	8.36	25

WHITE


CCT nominal	3000K
Fixture Power	11W
Nominal flux	1311lm
Fixture flux	1037lm
Luminous efficacy	97lm/W

RED

Fixture Power	8W
Nominal flux	471lm
Fixture flux	373lm
Luminous efficacy	47lm/W

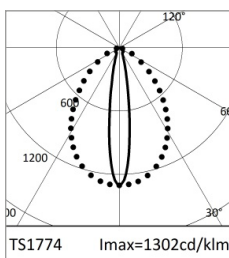

		H(m)	D1(m)	D2(m)	E _{max} (lx)		
		-	17°	80°			
Fixture Power	11W	1	0.30	1.67	1258		
Source Flux	966lm	2	0.59	3.34	314		
Fixture Flux	764lm	3	0.89	5.01	140		
Efficacy	69lm/W	4	1.18	6.69	79		
TS1774	I _{max} =1302cd/klm	I _{max}	1258cd	5	1.48	8.36	50

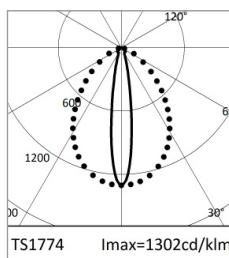

		H(m)	D1(m)	D2(m)	E _{max} (lx)		
		-	17°	80°			
Fixture Power	11W	1	0.30	1.67	246		
Source Flux	189lm	2	0.59	3.34	62		
Fixture Flux	150lm	3	0.89	5.01	27		
Efficacy	14lm/W	4	1.18	6.69	15		
TS1774	I _{max} =1302cd/klm	I _{max}	246cd	5	1.48	8.36	10

GREEN

Fixture Power	11W
Nominal flux	966lm
Fixture flux	764lm
Luminous efficacy	69lm/W

BLUE

Fixture Power	11W
Nominal flux	189lm
Fixture flux	150lm
Luminous efficacy	14lm/W

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process. Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A.: FI-275656



1E4244 | JEDI Recessed RGBW

Powerful recessed linear RGBW LED projector

Related codes

Insertion Box

L mm	Code
918	1E3508

Extruded anodized aluminium insertion box.

Accessories

Tool



Code

1E2495

Features TORX HEAD, TX 30.

Control systems



Code

1E2767

USB-RDM Programmer code.
DMX-RDM (Remote Device Management) address planner.
Used with the "RDM Targetti" software that can be downloaded for free from the Targetti website download section.
To be used with all RGBW products.
The USB-RDM programmer manages to direct DMX-RDM fixtures if there are no BUFFER or Splitter DMXs on the section.
Please refer to the instructions for more details.



Code

A077

my-SCENARIO Show Store.
Programmable DMX interface that integrates the latest innovations in lighting control in architectural and entertainment applications.
It features USB Type-C and Ethernet ports for programming and remote control.
The unit can be fully programmed with ESA Pro 2 software (available for Windows and Mac users) or via mobile applications such as Arcolis (available for iOS or Android devices).
It can be fully customised: pixel mapping, triggering management, patch configuration and much more.
The system offers great possibilities for the control of your lighting installation: multi zone control (allowing the management of up to 5 independent zones), extended triggers (time/date, Sunrise/Sunset, input ports, TCP/UDP commands), 16-bit channels management, full recovery after power loss, up to 99 total scenes, and 1024+ DMX channels.
The intuitive backlit keyboard comes with 10 preset buttons for a user friendly experience.



Code

1T6499

myScenario Wall.
DMX controller with a glass touch sensitive screen for architectural applications.
It can control two different DMX universes (2x 512 channels).
Stand alone function or connected to a computer using a USB port.
Software for creating scenarios (that can be downloaded from the Targetti website) included.
It can manage 10 different lighting zones and 50 scenarios per zone.
The touch keys on the front make it possible to modify and recall programmed scenarios.
USB cable included.
To be used with all RGBW products.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656



1E4244 | JEDI Recessed RGBW Powerful recessed linear RGBW LED projector

Surge protector



Code

A013A

Surge protector compatible with CLASS I lighting fixtures.

Operating voltage 230-277Vac.

SPD type 2+3.

Max surge protection 10kV.

CLASS I

IP67

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI