



T018MY940ELPW | LOGICO EASY Stand Alone 37 - UGR19

Linear stand alone LED fixture for ceiling mounted or suspension installation

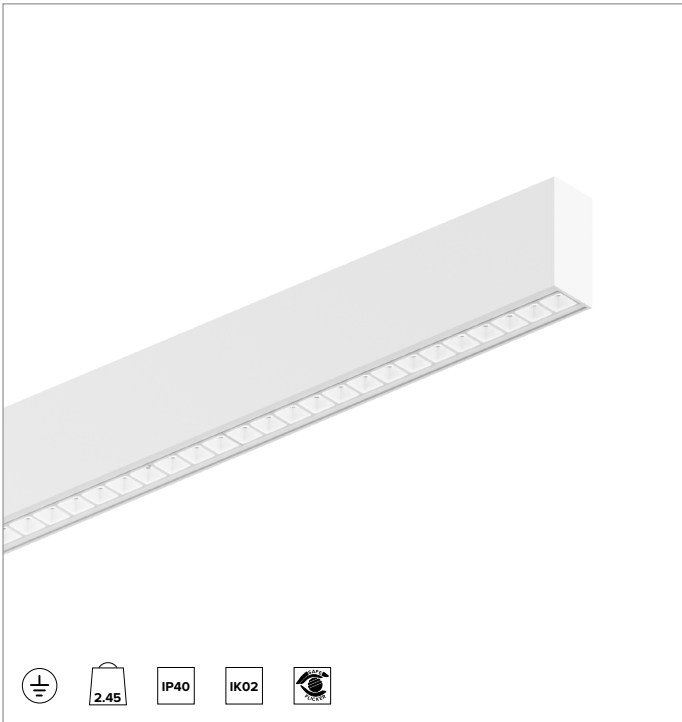

		4000K	H(m)	D1(m)	D2(m)	E _{max} (lx)
		Ra90	66°	64°		
Fixture Power	23W	1	1.29	1.26	1806	
Source Flux	2522lm	2	2.58	2.52	451	
Fixture Flux	2522lm	3	3.86	3.78	201	
Efficacy	110lm/W	4	5.15	5.04	113	
G0347A	I _{max} =810cd/klm	I _{max}	2044cd	5	6.44	6.30 72

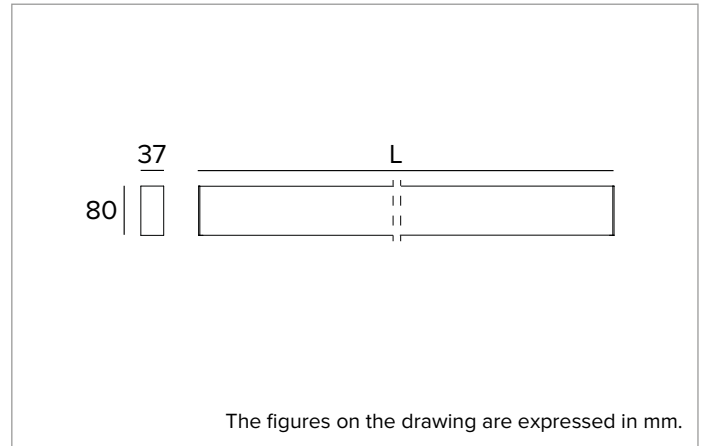

SOURCE

LED Engine made of linear LED boards Ra90.

Energy efficiency class: D

Nominal power: 19W

Nominal flux: 2522lm

Colour rendering index: 90

Rf: 92

Rg: 101

CCT nominal: 4000K

Lifetime (L80/B10): 100000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Direct emission. Controlled light. UGR19 Optics: optical system made of lenses with differentiated facets for optimizing the direction of the luminous flux and cellular optics in white anti-glare polycarbonate (UGR<19 and L65<1500 cd/m² EN-12464-1).

Emission: DIRECT

Optic: CELLULAR

Optical efficiency: 100%

Fixture flux: 2522lm

Luminous efficacy: 110lm/W

Photobiological safety: Compliant with RG0 exempt risk group

MECHANICAL CHARACTERISTICS

Painted extruded aluminium body with 37mm section and polycarbonate end caps. Upper closing screen in white PVC.

Colour and finish: White

Dimensions: L=1404mm

Weight: 2.45Kg

Version: LINEAR

Degree of protection: IP40

Mechanical Resistance: IK02

ELECTRICAL CHARACTERISTICS

Integrated electronic ON-OFF driver. Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 100% in DC.

Fixture Power: 23W

Power supply: 220-240Vac 50/60Hz

Insulation Class: CLASS 1

Type of driver / Control: ON-OFF

Driver included: YES

Class F: YES

SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

Ambient temperature: 0°C / +25°C

Relative humidity UR: <85%

INSTALLATION

To be completed with mounting systems for surface or suspended application.

REGULATIONS AND CERTIFICATIONS

CE.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

T018MY940ELPW | LOGICO EASY Stand Alone 37 - UGR19

Linear stand alone LED fixture for ceiling mounted or suspension installation

Accessories

Canopy



Colour	Code
○	A004W

Canopy with 5 poles terminal block.
Feeding cable not included.

Bracket



Code
A006S

Bracket for ceiling installation (2 pieces).
Two brackets needed for each lighting module.
For LOGICO EASY 37.



Code
A007S

Bracket with adjustment system for suspended installation (2 pieces).
Two brackets needed for each lighting module.
For LOGICO EASY 37.

Suspension



Version	Code
L=6m	A008T
L=5m	A008U
L=4m	A008V
L=3m	A008W
L=2m	A008X
L=1m	A008Y
L=0,5m	A008Z

Suspension cable (2 pieces).

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI