



**T022BX940D2DB | LOGICO EASY Stand Alone 57 - UGR19**  
 Linear stand alone LED fixture for ceiling mounted or suspension installation. Emergency version



	4000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)		
	Ra90	83°	89°				
	Fixture Power	79W	1	1.78	1.97	1358	
	Source Flux	6654lm	2	3.56	3.94	340	
	Fixture Flux	6654lm	3	5.33	5.91	151	
	Efficacy	84lm/W	4	7.11	7.88	85	
G0300	I <sub>max</sub> =226cd/klm	I <sub>max</sub>	1502cd	5	8.89	9.85	54

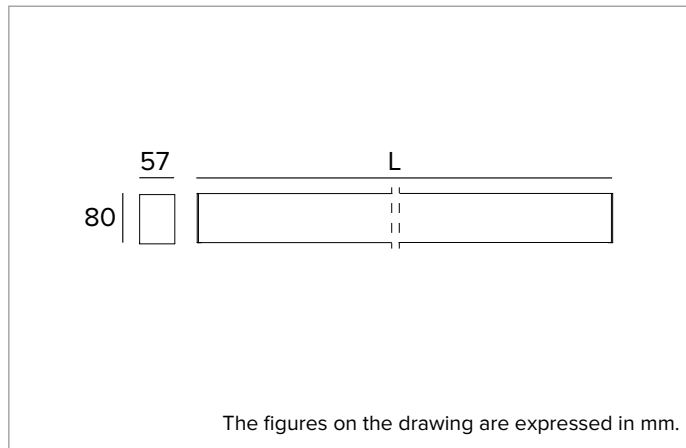

**SOURCE**

LED Engine made of linear LED boards Ra90.

- Energy efficiency class:** E
- Nominal power:** 70W
- Nominal flux:** 6654lm
- Colour rendering index:** 90
- Rf:** 92
- Rg:** 101
- CCT nominal:** 4000K
- Lifetime (L80/B10):** 100000h tq +25°C

**ILLUMINOTECHNICAL CHARACTERISTICS**

Direct/indirect emission. Controlled light. UGR19 optics: optical system made of a reflector with white polymer coating and UGR closing diffuser screen (UGR<19 and L65<3000 cd/m<sup>2</sup> EN-12464-1).

- Emission:** DIRECT/INDIRECT
- Optic:** REFLECTOR
- Optical efficiency:** 100%
- Fixture flux:** 6654lm
- Emergency fixture flux BLF:** 13% (Direct emission)
- Luminous efficacy:** 84lm/W
- Photobiological safety:** Compliant with RG0 exempt risk group

**MECHANICAL CHARACTERISTICS**

Painted extruded aluminium body with 57mm section and polycarbonate end caps. Upper closing screen in translucent polycarbonate.

- Colour and finish:** Black
- Dimensions:** L=2340mm
- Weight:** 6.67Kg
- Version:** LINEAR
- Degree of protection:** IP40
- Mechanical Resistance:** IK02

**ELECTRICAL CHARACTERISTICS**

Integrated electronic DALI2 driver. Equipped with emergency pack - permanent emergency (1h autonomy and 24h recharge).

- Fixture Power:** 79W
- Power supply:** 220-240Vac 50/60Hz
- Insulation Class:** CLASS 1
- Type of driver / Control:** DALI2 (EMERGENCY VERSION)
- Driver included:** YES
- Class F:** YES
- SAFE FLICKER:** PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light
- Ambient temperature:** 0°C / +25°C
- Relative humidity UR:** <85%

**INSTALLATION**

To be completed with mounting systems for surface or suspended application.

**NOTES**

Casambi control system available using a dedicated accessory. Consult factory to verify the quantity of DALI drivers installed. Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

**REGULATIONS AND CERTIFICATIONS**

CE.

**WARRANTY**

5 years.

**WARNING**

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

*Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process. Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).*

*We reserve the right to make technical changes.*

**T022BX940D2DB | LOGICO EASY Stand Alone 57 - UGR19**  
 Linear stand alone LED fixture for ceiling mounted or suspension installation. Emergency version

**Accessories**

**Canopy**



Colour	Code
●	<b>A004B</b>

Canopy with 5 poles terminal block.  
 Feeding cable not included.

**Bracket**



Code

**A007M**

Bracket with adjustment system for suspended installation (2 pieces).  
 Two brackets needed for each lighting module.  
 For LOGICO EASY 57.

**Suspension**



Version	Code
L=6m	<b>A008T</b>
L=5m	<b>A008U</b>
L=4m	<b>A008V</b>
L=3m	<b>A008W</b>
L=2m	<b>A008X</b>
L=1m	<b>A008Y</b>
L=0,5m	<b>A008Z</b>

Suspension cable (2 pieces).

**Control systems**



Code

**1T5349**

IP20 wireless control unit with DALI interface.  
 It generates a local DALI2 bus, enabling a direct connection to a DALI interface LED driver.  
 The module can only be used in a closed system and cannot be connected to an existing DALI network.  
 The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology.  
 The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures.  
 The control unit is preset to the DALI 1CH profile, meaning the device can control a single DALI driver with broadcast commands.  
 In addition to the DALI broadcast, other operating modes are available, such as:

- Button (normally open)
- Control unit 0/1-10V
- Control unit DALI Tunable White DT8
- Presence sensor



Code

**2T0131**

IP20 Extender for wireless control of LED driver with dimming DALI (or 1-10V) interface based on Casambi technology.  
 It has a DALI2 output with the capacity to control up to 40 lighting fixtures.  
 With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures.  
 IP20 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level.  
 In addition to the DALI broadcast other operating modes are available, such as:

- EXTENDER DALI 8CH
- EXTENDER DALI Tunable White
- EXTENDER 0/1-10V
- EXTENDER DALI 4CH
- EXTENDER DALI DT8 Tunable White

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.  
 Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.  
 Via Pratese, 164  
 50145 Firenze - Italy  
 Tel: +39 055 37911  
 targetti.com  
 targetti@targetti.com

CCIAA Firenze  
 Share Capital:  
 € 500.000,00  
 VAT N. (IT):  
 01537660480  
 R.E.A: FI-275656

