



T030BY840ELPW | LOGICO EASY Stand Alone 57 - UGR16

Linear stand alone LED fixture for ceiling mounted or suspension installation. Emergency version

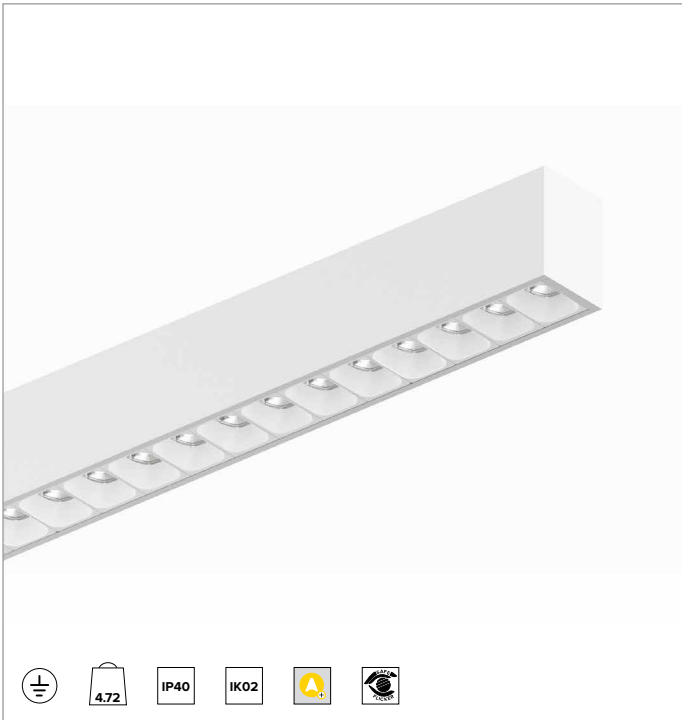

	4000K	H(m)	D1(m)	D2(m)	E _{max} (lx)	
Ra80		75°	59°			
Fixture Power	48W	1	1.54	1.14	1781	
Source Flux	5766lm	2	3.08	2.28	445	
Fixture Flux	5767lm	3	4.62	3.41	198	
Efficacy	120lm/W	4	6.16	4.55	111	
6000770 I _{max} =358cd/klm	I _{max}	2063cd	5	7.71	5.69	71

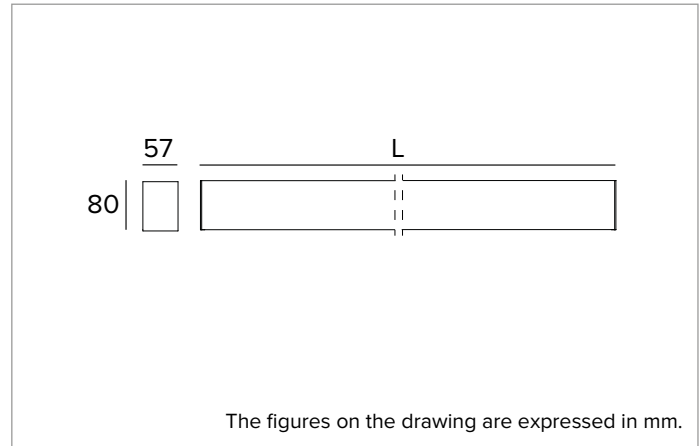

SOURCE

LED Engine made of linear LED boards Ra80.

Energy efficiency class: C, D

Nominal power: 30W

Nominal flux: 5766lm

Colour rendering index: 80

Rf: 84

Rg: 95

CCT nominal: 4000K

Lifetime (L80/B10): 100000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Direct/indirect emission. Controlled light. UGR16 Optics: optical system made of lenses with differentiated facets for optimizing the direction of the luminous flux and cellular optics in white anti-glare polycarbonate (UGR<16 and L65<1500 cd/m² EN-12464-1).

Emission: DIRECT/INDIRECT

Optic: CELLULAR

Optical efficiency: 100%

Fixture flux: 5766lm

Emergency fixture flux BLF: 35% (Direct emission)

Luminous efficacy: 120lm/W

Photobiological safety: Compliant with RG0 exempt risk group

MECHANICAL CHARACTERISTICS

Painted extruded aluminium body with 57mm section and polycarbonate end caps. Upper closing screen in translucent polycarbonate.

Colour and finish: White

Dimensions: L=1472mm

Weight: 4.72Kg

Version: LINEAR

Degree of protection: IP40

Mechanical Resistance: IK02

ELECTRICAL CHARACTERISTICS

Integrated electronic ON-OFF driver. Equipped with emergency pack - permanent emergency (1h autonomy and 24h recharge).

Fixture Power: 48W

Power supply: 220-240Vac 50/60Hz

Insulation Class: CLASS 1

Type of driver / Control: ON-OFF (EMERGENCY VERSION)

Driver included: YES

Class F: YES

SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light

Ambient temperature: 0°C / +25°C

Relative humidity UR: <85%

INSTALLATION

To be completed with mounting systems for surface or suspended application.

NOTES

Commissioning of the control system via free APP; the intervention of a specialist technician can be quoted on request.

REGULATIONS AND CERTIFICATIONS

CE.

WARRANTY

5 years.

WARNING

Luminaire designed for disposal/recycling at end-of-life. Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A.: FI-275656

TARGETTI

T030BY840ELPW | LOGICO EASY Stand Alone 57 - UGR16
 Linear stand alone LED fixture for ceiling mounted or suspension installation. Emergency version

Accessories

Canopy



Colour	Code
○	A004W

Canopy with 5 poles terminal block.
 Feeding cable not included.

Bracket



Code

A007M

Bracket with adjustment system for suspended installation (2 pieces).
 Two brackets needed for each lighting module.
 For LOGICO EASY 57.

Suspension



Version	Code
L=6m	A008T
L=5m	A008U
L=4m	A008V
L=3m	A008W
L=2m	A008X
L=1m	A008Y
L=0,5m	A008Z

Suspension cable (2 pieces).

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.
 Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
 Via Pratese, 164
 50145 Firenze - Italy
 Tel: +39 055 37911
 targetti.com
 targetti@targetti.com

CCIAA Firenze
 Share Capital:
 € 500.000,00
 VAT N. (IT):
 01537660480
 R.E.A: FI-275656

