


T043WFR940ELPW | ZENO 180

Professional adjustable LED projector



	4000K	H(m)	D(m)	Emax(lx)
	Ra90		52°	
	Fixture Power	57W	1	0.97 6690
	Source Flux	6510lm	2	1.94 1673
	Fixture Flux	5325lm	3	2.91 743
	Efficacy	94lm/W	4	3.88 418
TS1231	I _{max} =1028cd/klm	I _{max}	6690cd	5 4.85 268

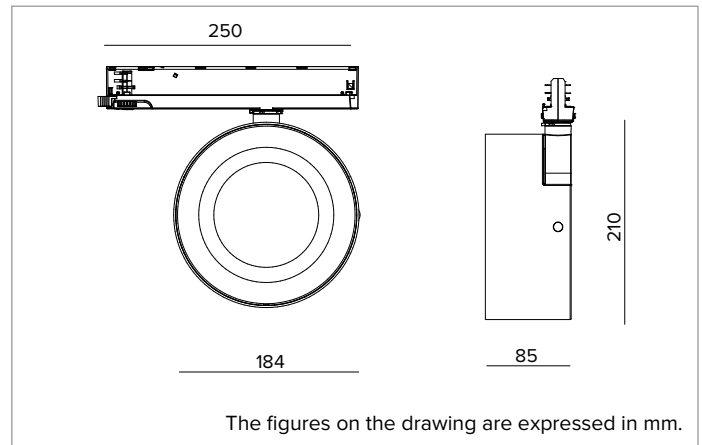

SOURCE

High efficiency Chip on Board LED Ra90. Ra97 on request.

Energy efficiency class: E

Nominal power: 49W

Nominal flux: 6510lm

Colour rendering index: 90

Rf: 90

Rg: 98

CCT nominal: 4000K

Lifetime (L80/B10): >50000h tq +25°C

ILLUMINOTECHNICAL CHARACTERISTICS

Wide Flood version with convex faceted highly reflective anodised aluminium precision optics and a PMMA holographic screen.

Optic: REFLECTOR

Beam angles: WFL

Optical efficiency: 82%

Fixture flux: 5325lm

Luminous efficacy: 94lm/W

MECHANICAL CHARACTERISTICS

Die-cast painted aluminium optical unit. The optical unit can be adjusted from 0 to -90° on the vertical plane; and 355° on the horizontal plane with aiming blocking system.

Colour and finish: Plaster white

Weight: 1.5Kg

Degree of protection: IP20

ELECTRICAL CHARACTERISTICS

ON-OFF electronic driver integrated into the track adapter.

Fixture Power: 57W

Power supply: 220-240Vac 50/60Hz

Insulation Class: CLASS 2

Type of driver / Control: ON-OFF

Driver included: YES

Class F: YES

Ambient temperature: 0°C / +25°C

INSTALLATION

Electrified track mounting. Mechanical and optic accessories available, to be installed with holder ring (necessary).

NOTES

110-277Vac version available on request.

WARRANTY

5 years.

Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process.

Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

We reserve the right to make technical changes.

Targetti Sankey S.r.l.
Via Pratese, 164
50145 Firenze - Italy
Tel: +39 055 37911
targetti.com
targetti@targetti.com

CCIAA Firenze
Share Capital:
€ 500.000,00
VAT N. (IT):
01537660480
R.E.A: FI-275656

TARGETTI

T043WFR940ELPW | ZENO 180
Professional adjustable LED projector

Accessories

Filter	
	
Code	
1T6054	

Blade of light filter.
Methacrylate holographic filter.
This makes the beam take on an oval shape and when combined with spotlights, the light blade appears more prominent.
To be completed with a dedicated holder ring.
It cannot be used with NSP and Wall Washer optics.

Grid	
	
Colour	Code
	1T6055

Anti-glare louver.
Black lacquered aluminium honeycomb structure.
To be completed with a dedicated holder ring.
It cannot be used with NSP and Wall Washer optics.

Cut-off	
	
Colour	Code
	1T6056
Black painted steel cut-off. To be completed with a dedicated holder ring. It cannot be used with NSP and Wall Washer optics.	

	
Colour	Code
	1T6057
Black painted steel asymmetric cut-off. To be completed with a dedicated holder ring. It cannot be used with NSP and Wall Washer optics.	

Ray Shade	
	
Colour	Code
	1T6058
Adjustable barn doors flaps made of black painted steel. To be completed with a dedicated holder ring. They cannot be used with NSP and Wall Washer optics.	

Holder Ring	
	
Colour	Code
	1T6053
Black painted aluminium accessory holder ring.	